



HEDI®

Ihr sicherer Anschluss.

PROFESSIONALS DO NOT
MAKE COMPROMISES!

Product program 2018

■ Made
■ in
■ Germany



www.hedi.de

HEDI – Made in Germany:

Innovation at the highest level!



In more than 45 years, the owner-managed, medium-sized company HEDI with its two core competencies has developed into a permanent fixture on the market. HEDI is your expert for cable assembly and switch cabinet construction, as well as for developing and manufacturing cable reels, extension cables, socket distributors, work and machine lamps. With approx. 8.000 m² of production and storage space at the Babenhausen site, HEDI is committed to Germany as a business location and to the quality "Made in Germany"!



A large part of our success is based on our innovative strength. The HEDI development department continuously develops fascinating market innovations, such as the innovative LED machine lamp. Our highly qualified team of in-house and field staff is in close, personal dialogue with end users and specialist trade partners. This is why we can always offer you the best advice, e. g. in terms of regulations. We are ISO 9001:2008 certified and many of our products are GS-approved.



The automated, robot-assisted production line, the fully automatic injection moulding machines and the continuous quality assurance guarantee a reassuring zero-fault rate. Our efficient organisation and logistics system ensures fast processing of all orders and on-time delivery, even for projects that are to be implemented at short notice.

Find out more: Current news, product novelties, test reports, product flyers etc. can be found at www.hedi.de.



The HEDI product solutions:

Competence and quality!



The HEDI product range covers two core competences: Cable assembly and switchgear cabinet manufacturing on the one hand and the development and production of cable reels, extension cables, socket distributors and work and machine luminaires on the other hand. With the StarLite to Professional Plus cable reel generations, HEDI sets new standards in terms of functionality, safety and quality.

Benefit from our production know-how. We are also experts in cable assembly. For example, individual reels can be manufactured for any desired application. Customer-specific cable printing is also one of our distinctive services.



HEDI products are sold exclusively through qualified trade partners. Our philosophy of personal advising with high quality and cross-divisional expertise is consistently implemented here.


HEDI. Your safe connection.





Safety carries your name:

Cable printing with HEDI!

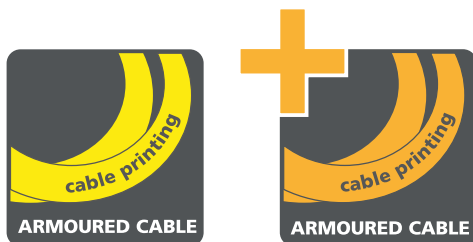

Both, the yellow HEDI armoured cable and the orange HEDI armoured cable PLUS are highly flexible and abrasion-resistant cables of highest quality. From a minimum order quantity of 200 m, the uniform, individual cable printing on these cable types with your logo or lettering is not only useful for advertising purposes; it is also the perfect property identification and thus protects against theft.

Since the marking is etched into the cable sheath, the high-quality printing offers utmost abrasion resistance.

Both cable types have been developed for extremely rough operation. Approved for a temperature range of -35 °C to +80 °C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example).

The special plastic compound of the outer jacket and the fine-stranded strand structure with core insulation of the HEDI armoured cable ensure extremely high flexibility even at very low temperatures.

The mechanical load-bearing capacity of the polyurethane cable of the HEDI armoured cable PLUS is even higher than with the HEDI armoured cable. The cable is completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement. It is therefore ideally suited for use under difficult conditions such as construction sites.





The counter display with an informative user brochure ensures efficient sales promotion. It informs about all details and possibilities of cable printing with HEDI.

We are also happy to provide you with printed sample cables.



Made
in
Germany



In this catalogue, all important characteristic details are additionally marked with pictograms. These pictograms and other characters are described in detail on page 135.

Fold out page 136 and you have an overview of the explanations at all times when you browse through the catalogue.

Your safe connection:

The HEDI product program

| Content | Page |
|--|---------|
| The company HEDI | 02-05 |
| HEDI cable printing | 06-07 |
| Table of contents | 08-09 |
| CABLE REELS (from page 11) | |
| Cable boxes | 14 |
| Cable reels | 15-35 |
| Three-phase AC cable reels | 36-49 |
| Carriage for cable reels Professional PLUS 450 | 50 |
| Cable reels IP65 | 52-53 |
| Equipment cable reels | 54-63 |
| Equipment cable reels with suspending coupling | 64-67 |
| Empty cable reels for individual assembly | 68-69 |
| Compressed-air hose reels | 70-71 |
| Spring-loaded cable reels (AC, three-phase AC, and compressed air) | 72-73 |
| CABLES AND EXTENSION CABLES (from page 75) | |
| Extension cables | 76-78 |
| Extension cables with suspending coupling | 79 |
| Protective devices / Extension cables with protective devices | 80-83 |
| SpiralPlus | 84 |
| Extension cables / three-phase AC version | 85-90 |
| Compressed-air hose extensions | 90 |
| Machine connecting cables | 91 |
| Cut-to-order lengths | 92-93 |
| DISTRIBUTORS (from page 95) | |
| Suspended energy distributors HEDI e.STATION | 96-97 |
| Socket distributors HEDI m.STATION | 98-100 |
| Socket distributor made from solid rubber | 102 |
| Multiple sockets made from solid rubber | 103 |
| Miniature socket distributors and adapter plugs | 104 |
| Multiple sockets | 105 |
| LAMPS (from page 107) | |
| Working lamps | 108-113 |
| Halogen spotlights | 114-116 |
| LED spotlights | 117 |
| Hand lamps | 118-119 |
| Machine and workbench lamps | 120-125 |
| ACCESSORIES (from page 127) | |
| CableFix | 128 |
| Plugs, sockets and adapter cables | 130-132 |
| Wall-mounted and flush-mounted sockets | 133 |
| Spare parts for cable reels | 134 |
| Technical details, explanation of symbols | 135 |



Re-experience functionality:

HEDI cable reels

The HEDI StarLite, Primus, Professional and Professional Plus cable reels are the best HEDI has ever built. More than 45 years of experience are the basis for outstanding functional details, safety and quality.

For each user, the product range offers the perfect cable reel. No matter whether for industry, on the construction site, for the craftsman or for private use.

The product portfolio includes the StarLite, Primus and Professional series. The Professional Plus series is a class of its own.

HEDI. Your safe connection.

The range includes:

| | Page |
|--|-------|
| ■ Cable boxes | 14 |
| ■ Cable reels | 15-35 |
| ■ Three-phase AC cable reels | 36-49 |
| ■ Carriage for cable reels Professional PLUS 450 | 50 |
| ■ Cable reels IP65 | 52-53 |
| ■ Equipment cable reels | 55-63 |
| ■ Equipment cable reels with suspending coupling | 64-67 |
| ■ Empty reels for individual assembly | 68-69 |
| ■ Compressed-air hose reels | 70-71 |
| ■ Spring-loaded cable reels | 72-73 |



HEDI StarLite, Primus and Professional:

Reels for all applications!



HEDI StarLite:
The clever light-weight!

- High-quality plastic design.
- Reel diameter Ø 255 mm.
- Optimum price/performance ratio.
- For do-it-yourselfers.



HEDI Primus:
The robust all-around fighters!

- Plastic or sheet steel cable reel.
- Reel diameter Ø 255 mm.
- Sturdy steel tube frame for a secure stand.
- For craftspersons and do-it-yourselfers.



HEDI Professional:
The perfect all-rounders!

- Plastic or sheet steel cable reel.
- Reel diameter Ø 290 mm.
- Sturdy, continuous steel tube frame for maximum stability.
- For craftspersons.

Product benefits HEDI StarLite, Primus and Professional:

Ergonomic handlebar grip and plug parking station



Ergonomic and insulated handle for better carrying comfort. Plug parking station to secure cable and plug.

Rotation stop switch



Rotation stop switch to lock the reel body at the rear.

DiagS diagnosis system



Green lamp shines: The cable reel is operational. Red and green lamp shine: The thermostatic circuit-breaker has tripped and thus interrupted the power supply.

Full grounding



All HEDI steel sheet reels are fully grounded and thus offer maximum safety in all applications.

HEDI Professional Plus:

Reels for special applications!



HEDI Professional Plus: Reels for special applications!

- Extremely robust plastic reel.
- Reel diameter Ø 320 mm or Ø 450 mm.
- With many assembly variants.
- Stable cable grip for secure hold.
- Connection space separated from the axle to prevent abrasion damage and penetration of dirt and water.
- Kink-free cable entry for durability.
- Plastic cast steel tube base for absolute stability and insulation protection.

Carrying handle



Convenient carrying handle.

Locking brake



For easy operation, the brake is protected by the handle. It also prevents the cable from being clamped between reel body and foot.

Rotary handle



The generously dimensioned rotary handle can be swivelled out of position.

Steel tube foot



The steel tube base is cast into the plastic and thus offers the highest possible stability and degree of insulation.



The small cable boxes for indoor use are attractively designed and handy. The housings are made from high-quality, unbreakable plastic, the cables are easy to unroll and rewind. The cable boxes are equipped with 4 VDE-certified socket outlets and integrated overload protection. Also available are practical cable box retainers to fix the box to walls and workshop trolleys.

Small and practical - for indoor use:

HEDI cable boxes.



Made
in
Germany

- Packaging unit: 6 pieces
- Dimensions: 280 x 230 x 80 mm

HEDI cable box

PVC cable H05VV-F, for use in dry environment

| Art. no. | EAN | Cable length and cable type | Standard colour | | Remark |
|----------|---------------|-----------------------------|-----------------|--|----------|
| KBT08T | 4003644003808 | 8 m H05VV-F 3G1.5 | Turquoise | | IP20, GS |
| KBB10T | 4003644003815 | 10 m H05VV-F 3G1.5 | Blue | | IP20, GS |
| KBR15T | 4003644003822 | 15 m H05VV-F 3G1.5 | Red | | IP20, GS |



Retainer for HEDI cable boxes

Practical retainer made from plastic, for the attachment of HEDI cable boxes to workshop trolleys, perforated walls and smooth walls on four hooks on the back of the retainer, or 2 screw holes. Additionally, the holder is equipped with two holding trays for spray cans or similar equipment.

The HEDI cable box can be used when it is suspended, but can also be easily removed and used as a mobile unit.

Required grid dimension for easy installation on perforated walls:
37 or 38 mm, hole size 9 x 9 mm.

| Art. no. | EAN | Standard colour | | Remark |
|----------|---------------|-----------------|--|--------|
| 9042 | 4003644015122 | Black | | — |



Made
in
Germany

The light, fully insulated plastic cable reel HEDI StarLite for non-commercial use is a durable product with an ergonomic carrying handle, plug parking station and rotation stop switch. Both vertical and horizontal use are possible. It is extremely stable due to its low centre of gravity, and is equipped with a 4-way socket outlet and overload protection tested in accordance with VDE standards.




For use in a dry environment:

HEDI cable reels with PVC cable.



Made in Germany



HEDI cable reel StarLite

PVC cable H05VV-F, for use in dry environment

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------|
| K0Y000T | 4003644002375 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| K0Y25PT | 4003644002658 | 25 m H05VV-F 3G1.5 | | IP20, GS |
| K0Y35PT | 4003644006458 | 35 m H05VV-F 3G1.5 | | IP20, GS |
| K0Y40PT | 4003644003938 | 40 m H05VV-F 3G1.5 | | IP20, GS |
| K0Y50PT | 4003644003884 | 50 m H05VV-F 3G1.5 | | IP20, GS |



Cable reels

Cables and extension cables

Distributors

Lamps


Accessories



The cable reels in plastic or sheet steel design convince with many features, such as the ergonomic carrying handle, the plug parking station and the rotation stop switch. Due to the special design, both vertical and horizontal applications are possible. It is extremely stable due to its low centre of gravity, and is equipped with a 4-way socket outlet and overload protection tested in accordance with VDE standards.

For use in a dry environment:

HEDI cable reels with PVC cable.




HEDI cable reel Primus

Plastic, PVC cable H05VV-F, for use in dry environment

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------|
| K1Y000T | 4003644008162 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| K1Y25PT | 4003644007974 | 25 m H05VV-F 3G1.5 | | IP20, GS |
| K1Y50PT | 4003644003891 | 50 m H05VV-F 3G1.5 | | IP20, GS |

Made in Germany



HEDI cable reel Primus

Sheet steel, PVC cable H05VV-F, for use in dry environment


| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------|
| K1S000T | 4003644008148 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| K1S25PT | 4003644008100 | 25 m H05VV-F 3G1.5 | | IP20, GS |
| K1S50PT | 4003644005079 | 50 m H05VV-F 3G1.5 | | IP20, GS |

Made in Germany



For use in a dry environment:

HEDI cable reels with rubber cable.




HEDI cable reel Primus

Plastic, rubber cable H05RR-F, for use in dry environment

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------|
| K1Y000T | 4003644008162 | Empty – for up to 50 m H05RR-F 3G1.5 | | – |
| K1Y25GT | 4003644007837 | 25 m H05RR-F 3G1.5 | | IP20, GS |
| K1Y50GT | 4003644003976 | 50 m H05RR-F 3G1.5 | | IP20, GS |

Made in Germany



HEDI cable reel Primus

Sheet steel, rubber cable H05RR-F, for use in dry environment

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------|
| K1S000T | 4003644008148 | Empty – for up to 50 m H05RR-F 3G1.5 | | – |
| K1S25GT | 4003644008155 | 25 m H05RR-F 3G1.5 | | IP20, GS |
| K1S50GT | 4003644007790 | 50 m H05RR-F 3G1.5 | | IP20, GS |

Made in Germany





The plastic or sheet steel reels are equipped with an ergonomic carrying handle, plug parking station and rotation stop switch. They are extremely stable due to their low centre of gravity. This allows them to be used in a horizontal or vertical position. The reels are equipped with a tested triple socket outlet in accordance with VDE Standards, with integrated plug sealing lip, the HEDI DiagS diagnostic system and overload protection.


For short-term outdoor use:

HEDI cable reels with rubber cable.



■ With HEDI DiagS diagnosis system

Made
in
Germany



HEDI cable reel Primus


Plastic, rubber cable H05RR-F, for short-term outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------------|
| K1Y000TF | 4003644008216 | Empty – for up to 50 m H05RR-F 3G1.5 | | – |
| K1Y25GTF | 4003644007806 | 25 m H05RR-F 3G1.5 | | IP44, GS, KEMA |
| K1Y50GTF | 4003644007813 | 50 m H05RR-F 3G1.5 | | IP44, GS, KEMA |



■ With HEDI DiagS diagnosis system

Made
in
Germany



HEDI cable reel Professional


Plastic, rubber cable H05RR-F, for short-term outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-------------------------------------|--|----------------|
| K2Y000TF | 4003644008636 | Empty – for up to 50 m H05RR F3G1.5 | | – |
| K2Y50GTF | 4003644008667 | 50 m H05RR-F 3G1.5 | | IP44, GS, KEMA |
| K2Y25G2TF | 4003644008025 | 25 m H05RR-F 3G2.5 | | IP44, GS, KEMA |
| K2Y40G2TF | 4003644008056 | 40 m H05RR-F 3G2.5 | | IP44, GS, KEMA |



■ With HEDI DiagS diagnosis system

Made in Germany



HEDI cable reel Primus


Sheet steel, rubber cable H05RR-F, for short-term outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|----------------|
| K1S000TF | 4003644002351 | Empty – for up to 50 m H05RR-F 3G1.5 | | – |
| K1S25GTF | 4003644008186 | 25 m H05RR-F 3G1.5 | | IP44, GS, KEMA |
| K1S50GTF | 4003644002368 | 50 m H05RR-F 3G1.5 | | IP44, GS, KEMA |



■ With HEDI DiagS diagnosis system

Made in Germany



HEDI cable reel Professional

Sheet steel, rubber cable H05RR-F, for short-term outdoor use


| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|----------------|
| K2S000TF | 4003644008094 | Empty – for up to 50 m H05RR-F 3G1.5 | | – |
| K2S50GTF | 4003644007424 | 50 m H05RR-F 3G1.5 | | IP44, GS, KEMA |
| K2S25G2TF | 4003644008360 | 25 m H05RR-F 3G2.5 | | IP44, GS, KEMA |
| K2S40G2TF | 4003644008377 | 40 m H05RR-F 3G2.5 | | IP44, GS, KEMA |



The plastic or sheet steel reels are equipped with an ergonomic carrying handle, plug parking station and rotation stop switch. They are extremely stable due to their low centre of gravity. This allows them to be used in a horizontal or vertical position. The reels are equipped with a tested triple socket outlet in accordance with VDE Standards, with integrated plug sealing lip, the HEDI DiagS diagnostic system and overload protection.

For permanent outdoor use:

HEDI cable reels with neoprene-rubber cable.



HEDI cable reel Primus


Plastic, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|--------------------------------------|-------------------------|
| K1Y000TF | 4003644008216 | Empty – for up to 40 m H07RN-F 3G1.5 | – |
| K1Y25NTF | 4003644007844 | 25 m H07RN-F 3G1.5 | IP44, GS, KEMA, BGI 608 |
| K1Y40NTF | 4003644003990 | 40 m H07RN-F 3G1.5 | IP44, GS, KEMA, BGI 608 |
| K1Y40NTF010 | 4003644014392 | 40 m H07RN-F 3G1.5 red | IP44, BGI 608 |



■ With HEDI DiagS diagnosis system

Made in Germany



HEDI cable reel Professional

Plastic, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|--------------------------------------|-------------------------|
| K2Y000TF | 4003644008636 | Empty – for up to 50 m H07RN-F 3G1.5 | – |
| K2Y40NTF | 4003644008087 | 40 m H07RN-F 3G1.5 | IP44, GS, KEMA, BGI 608 |
| K2Y50NTF | 4003644004607 | 50 m H07RN-F 3G1.5 | IP44, GS, KEMA, BGI 608 |
| K2Y25N2TF | 4003644008063 | 25 m H07RN-F 3G2.5 | IP44, GS, KEMA, BGI 608 |
| K2Y33N2TF | 4003644005581 | 33 m H07RN-F 3G2.5 | IP44, GS, KEMA, BGI 608 |
| K2Y40N2TF | 4003644004713 | 40 m H07RN-F 3G2.5 | IP44, GS, KEMA, BGI 608 |



■ With HEDI DiagS diagnosis system


Made in Germany





■ With HEDI DiagS diagnosis system

Made
in
Germany



HEDI cable reel Primus


Sheet steel, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|--------------------------------------|--|----------------|
| K1S000TF | 4003644002351 | Empty – for up to 40 m H07RN-F 3G1.5 | | – |
| K1S25NTF | 4003644008193 | 25 m H07RN-F 3G1.5 | | IP44, GS, KEMA |
| K1S40NTF | 4003644003914 | 40 m H07RN-F 3G1.5 | | IP44, GS, KEMA |
| K1S40NTF010 | 4003644014408 | 40 m H07RN-F 3G1.5 red | | IP44 |



■ With HEDI DiagS diagnosis system

Made
in
Germany



HEDI cable reel Professional

Sheet steel, neoprene-rubber cable H07RN-F, for permanent outdoor use


| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|----------------|
| K2S000TF | 4003644008094 | Empty – for up to 50 m H07RN-F 3G1.5 | | – |
| K2S40NTF | 4003644007431 | 40 m H07RN-F 3G1.5 | | IP44, GS, KEMA |
| K2S50NTF | 4003644007448 | 50 m H07RN-F 3G1.5 | | IP44, GS, KEMA |
| K2S25N2TF | 4003644007943 | 25 m H07RN-F 3G2.5 | | IP44, GS, KEMA |
| K2S33N2TF | 4003644017225 | 33 m H07RN-F 3G2.5 | | IP44, GS, KEMA |
| K2S40N2TF | 4003644007455 | 40 m H07RN-F 3G2.5 | | IP44, GS, KEMA |



The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large swivelling rotary handle. Its low centre of gravity makes it extremely stable. The reel can be used in vertical or horizontal position. The optionally installed residual current device (RCD), the Schuko sockets tested in accordance with VDE Standards, and the overload protection guarantee absolute safety.

For permanent outdoor use:

HEDI cable reels with neoprene-rubber cable.



■ With HEDI DiagS diagnosis system


Made in Germany



HEDI cable reel Professional Plus 320

With 4-way socket, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|----------|---------------|--------------------------------------|---------------|
| K3000TF | 4003644010035 | Empty – for up to 60 m H07RN-F 3G1.5 | – |
| K340NTF | 4003644019687 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K350NTF | 4003644010011 | 50 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K360NTF | 4003644017232 | 60 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K325N2TF | 4003644010059 | 25 m H07RN-F 3G2.5 | IP44, BGI 608 |
| K340N2TF | 4003644010066 | 40 m H07RN-F 3G2.5 | IP44, BGI 608 |
| K350N2TF | 4003644000548 | 50 m H07RN-F 3G2.5 | IP44, BGI 608 |



Made in Germany



HEDI cable reel Professional Plus 320

With 4 individual sockets, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|--------------------------------------|---------------|
| K3000TFE | 4003644010042 | Empty – for up to 60 m H07RN-F 3G1.5 | – |
| K340NTFE | 4003644017249 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K350NTFE | 4003644010028 | 50 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K360NTFE | 4003644017256 | 60 m H07RN-F 3G1.5 | IP44, BGI 608 |
| K325N2TFE | 4003644010226 | 25 m H07RN-F 3G2.5 | IP44, BGI 608 |
| K340N2TFE | 4003644010271 | 40 m H07RN-F 3G2.5 | IP44, BGI 608 |
| K350N2TFE | 4003644017263 | 50 m H07RN-F 3G2.5 | IP44, BGI 608 |




Made
in
Germany



HEDI cable reel Professional Plus 320

With residual current device (RCD) 25 / 0.03 A, neoprene rubber cable H07RN-F, for continuous outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3000TFI | 4003644010141 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K340NTFI | 4003644019601 | 40 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K350NTFI | 4003644010080 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K360NTFI | 4003644017270 | 60 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K325N2TFI | 4003644010134 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K340N2TFI | 4003644010264 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K350N2TFI | 4003644017287 | 50 m H07RN-F 3G2.5 | | IP44, BGI 608 |





The plastic or sheet steel reels are equipped with an ergonomic carrying handle, plug parking station and rotation stop switch. They are extremely stable due to their low centre of gravity. This allows them to be used in a horizontal or vertical position. The reels are equipped with a tested triple socket outlet in accordance with VDE Standards, with integrated plug sealing lip, the HEDI DiagS diagnostic system and overload protection.

For permanent outdoor use:

HEDI cable reels with armoured cable.



■ With HEDI DiagS diagnosis system




HEDI cable reel Primus

Plastic material, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|----------|
| K1Y25UTF | 4003644008223 | 25 m AT-N07V3V3-F 3G1.5 | | IP44, GS |
| K1Y40UTF | 4003644008230 | 40 m AT-N07V3V3-F 3G1.5 | | IP44, GS |

Made in Germany



■ With HEDI DiagS diagnosis system




HEDI cable reel Professional

Plastic material, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|----------|
| K2Y40UTF | 4003644004638 | 40 m AT-N07V3V3-F 3G1.5 | | IP44, GS |
| K2Y50UTF | 4003644008681 | 50 m AT-N07V3V3-F 3G1.5 | | IP44, GS |
| K2Y25U2TF | 4003644008001 | 25 m AT-N07V3V3-F 3G2.5 | | IP44, GS |
| K2Y33U2TF | 4003644011315 | 33 m AT-N07V3V3-F 3G2.5 | | IP44, GS |
| K2Y40U2TF | 4003644004645 | 40 m AT-N07V3V3-F 3G2.5 | | IP44, GS |

Made in Germany



The yellow HEDI armoured cable (K35/AT-N07V3V3-F) is a highly flexible and abrasion-resistant cable. Both cable types have been developed for extremely rough operation. Approved for a temperature range of -35°C to 80°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The cable is highly flexible, even at extremely low temperatures, completely weatherproof, oil and acid-resistant, microbe-proof and resistant to embrittlement.



■ With HEDI DiagS diagnosis system




Made in Germany

HEDI cable reel Primus

Sheet steel, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|----------|---------------|-----------------------------|----------|
| K1S25UTF | 4003644008209 | 25 m AT-N07V3V3-F 3G1.5 | IP44, GS |
| K1S40UTF | 4003644003945 | 40 m AT-N07V3V3-F 3G1.5 | IP44, GS |



■ With HEDI DiagS diagnosis system




Made in Germany

HEDI cable reel Professional

Sheet steel, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|----------|
| K2S40UTF | 4003644008346 | 40 m AT-N07V3V3-F 3G1.5 | IP44, GS |
| K2S50UTF | 4003644007851 | 50 m AT-N07V3V3-F 3G1.5 | IP44, GS |
| K2S25U2TF | 4003644008605 | 25 m AT-N07V3V3-F 3G2.5 | IP44, GS |
| K2S33U2TF | 4003644017294 | 33 m AT-N07V3V3-F 3G2.5 | IP44, GS |
| K2S40U2TF | 4003644008629 | 40 m AT-N07V3V3-F 3G2.5 | IP44, GS |






The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large swivelling rotary handle. Their low centre of gravity makes them extremely stable. They can be used in vertical or horizontal position. The optionally installed residual current device (RCD), the Schuko sockets tested in accordance with VDE Standards, and the overload protection guarantee absolute safety.

For permanent outdoor use:

HEDI cable reels with armoured cable.



■ With HEDI DiagS diagnosis system




HEDI cable reel Professional Plus 320

With 4-way socket, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| K340UTF | 4003644010417 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K350UTF | 4003644010431 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K360UTF | 4003644017300 | 60 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K325U2TF | 4003644010455 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K340U2TF | 4003644010448 | 40 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K350U2TF | 4003644014071 | 50 m AT-N07V3V3-F 3G2.5 | | IP44 |

Made in Germany



HEDI cable reel Professional Plus 320

With 4 individual sockets, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| K340UTFE | 4003644017317 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K350UTFE | 4003644017324 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K325U2TFE | 4003644017331 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K340U2TFE | 4003644013838 | 40 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K350U2TFE | 4003644017355 | 50 m AT-N07V3V3-F 3G2.5 | | IP44 |

Made in Germany



The yellow HEDI armoured cable (K35/AT-N07V3V3-F) is a highly flexible and abrasion-resistant cable. Both cable types have been developed for extremely rough operation. Approved for a temperature range of -35°C to 80°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The cable is highly flexible, even at extremely low temperatures, completely weatherproof, oil and acid-resistant, microbe-proof and resistant to embrittlement.



For permanent outdoor use:

HEDI cable reels with armoured cable and residual current device.




Made in Germany

HEDI cable reel Professional Plus 320

With residual current device (RCD) 25 / 0.03 A, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| K340UTFI | 4003644017362 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K350UTFI | 4003644017379 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| K325U2TFI | 4003644010622 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K340U2TFI | 4003644005024 | 40 m AT-N07V3V3-F 3G2.5 | | IP44 |
| K350U2TFI | 4003644017409 | 50 m AT-N07V3V3-F 3G2.5 | | IP44 |





The plastic or sheet steel reels are equipped with an ergonomic carrying handle, plug parking station and rotation stop switch. They are extremely stable due to their low centre of gravity. This allows them to be used in a horizontal or vertical position. The reels are equipped with a tested triple socket outlet in accordance with VDE Standards, with integrated plug sealing lip, the HEDI DiagS diagnostic system and overload protection.

For permanent outdoor use:

HEDI cable reels with armoured cable PLUS.



■ With HEDI DiagS diagnosis system




HEDI cable reel Primus

Plastic material, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|----------|---------------|-----------------------------|-------------------|
| K1Y25QTF | 4003644015528 | 25 m H07BQ-F 3G1.5 | IP44, GS, BGI 608 |
| K1Y40QTF | 4003644011292 | 40 m H07BQ-F 3G1.5 | IP44, GS, BGI 608 |

Made in Germany



■ With HEDI DiagS diagnosis system




HEDI cable reel Professional

Plastic material, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|----------------|-----------------------------|-------------------|
| K2Y40QTF | 40036440015269 | 40 m H07BQ-F 3G1.5 | IP44, GS, BGI 608 |
| K2Y50QTF | 40036440014163 | 50 m H07BQ-F 3G1.5 | IP44, GS, BGI 608 |
| K2Y25Q2TF | 40036440015467 | 25 m H07BQ-F 3G2.5 | IP44, GS, BGI 608 |
| K2Y33Q2TF | 40036440016235 | 33 m H07BQ-F 3G2.5 | IP44, GS, BGI 608 |
| K2Y40Q2TF | 40036440015368 | 40 m H07BQ-F 3G2.5 | IP44, GS, BGI 608 |

Made in Germany



The HEDI armoured cable PLUS is a standardized, highly flexible and heavy-duty cable. Approved for a temperature range of -40°C to 90°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The HEDI armoured cable PLUS is highly flexible, even at temperatures of -40°C. It is completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement.




Made in Germany

HEDI cable reel Primus

Sheet steel, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|----------|---------------|-----------------------------|----------|
| K1S25QTF | 4003644017416 | 25 m H07BQ-F 3G1.5 | IP44, GS |
| K1S40QTF | 4003644013968 | 40 m H07BQ-F 3G1.5 | IP44, GS |




Made in Germany

HEDI cable reel Professional

Sheet steel, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|----------|
| K2S40QTF | 4003644017133 | 40 m H07BQ-F 3G1.5 | IP44, GS |
| K2S50QTF | 4003644016143 | 50 m H07BQ-F 3G1.5 | IP44, GS |
| K2S25Q2TF | 4003644017430 | 25 m H07BQ-F 3G2.5 | IP44, GS |
| K2S33Q2TF | 4003644017447 | 33 m H07BQ-F 3G2.5 | IP44, GS |
| K2S40Q2TF | 4003644016228 | 40 m H07BQ-F 3G2.5 | IP44, GS |






The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large swivelling rotary handle. Their low centre of gravity makes them extremely stable. They can be used in vertical or horizontal position. The optionally installed residual current device (RCD), the Schuko sockets tested in accordance with VDE Standards, and the overload protection guarantee absolute safety.

For permanent outdoor use:

HEDI cable reels with armoured cable PLUS.



HEDI cable reel Professional Plus 320

With 4-way socket, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use




■ With HEDI DiagS diagnosis system

Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|---------------|
| K340QTF | 4003644017201 | 40 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| K350QTF | 4003644017461 | 50 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| K360QTF | 4003644017478 | 60 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| K325Q2TF | 4003644017485 | 25 m H07BQ-F 3G2.5 | | IP44, BGI 608 |
| K340Q2TF | 4003644017492 | 40 m H07BQ-F 3G2.5 | | IP44, BGI 608 |
| K350Q2TF | 4003644017508 | 50 m H07BQ-F 3G2.5 | | IP44, BGI 608 |



HEDI cable reel Professional Plus 320

With 4 individual sockets, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|---------------|
| K340QTFE | 4003644017515 | 40 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| K350QTFE | 4003644017522 | 50 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| K325Q2TFE | 4003644017539 | 25 m H07BQ-F 3G2.5 | | IP44, BGI 608 |
| K340Q2TFE | 4003644017546 | 40 m H07BQ-F 3G2.5 | | IP44, BGI 608 |
| K350Q2TFE | 4003644017553 | 50 m H07BQ-F 3G2.5 | | IP44, BGI 608 |

The HEDI armoured cable PLUS is a standardized, highly flexible and heavy-duty cable. Approved for a temperature range of -40°C to 90°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The HEDI armoured cable PLUS is highly flexible, even at temperatures of -40°C. It is completely weather-proof, oil- and acid-resistant, microbe-proof and resistant to embrittlement.




Cable reels

For permanent outdoor use:

HEDI cable reels with armoured cable PLUS and residual current device.

Cables and extension cables



HEDI cable reel Professional Plus 320

With residual current device (RCD) 25 / 0.03 A, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|---------------|
| K340QTFI | 4003644017560 | 40 m H07BQ-F 3G1.5 | IP44, BGI 608 |
| K350QTFI | 4003644017577 | 50 m H07BQ-F 3G1.5 | IP44, BGI 608 |
| K325Q2TFI | 4003644017584 | 25 m H07BQ-F 3G2.5 | IP44, BGI 608 |
| K340Q2TFI | 4003644015962 | 40 m H07BQ-F 3G2.5 | IP44, BGI 608 |
| K350Q2TFI | 4003644017607 | 50 m H07BQ-F 3G2.5 | IP44, BGI 608 |

Made in Germany



Distributors



Lamps


Accessories



Made from plastic or sheet steel, the Professional cable reels are equipped with an ergonomic carrying handle, plug parking station and rotation stop switch. Due to their low centre of gravity, they are extremely stable and can be used both vertically and horizontally. They are equipped with 1 CEE socket 3x16 A, 2 Schuko sockets and an overload protection in accordance with VDE standard.

For permanent outdoor use:

HEDI cable reels CEE 3x16 A version with neoprene-rubber cable.




HEDI cable reel Professional

With 1 CEE socket 3x16 A, 2 Schuko sockets and overload protection, plastic, neoprene rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|---------------|
| K2Y000TFC | 4003644017614 | Empty – for up to 50 m H07RN-F 3G1.5 | | – |
| K2Y25NTFC | 4003644009695 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K2Y50NTFC | 4003644009701 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K2Y25N2TFC | 4003644009435 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K2Y33N2TFC | 4003644017621 | 33 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K2Y40N2TFC | 4003644009176 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |

Made in Germany



HEDI cable reel Professional


With 1 CEE socket 3x16 A, 2 Schuko sockets and overload protection, sheet steel, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|--------|
| K2S000TFC | 4003644017638 | Empty – for up to 50 m H07RN-F 3G1.5 | | – |
| K2S25NTFC | 4003644009718 | 25 m H07RN-F 3G1.5 | | IP44 |
| K2S50NTFC | 4003644009725 | 50 m H07RN-F 3G1.5 | | IP44 |
| K2S25N2TFC | 4003644009732 | 25 m H07RN-F 3G2.5 | | IP44 |
| K2S33N2TFC | 4003644017652 | 33 m H07RN-F 3G2.5 | | IP44 |
| K2S40N2TFC | 4003644009749 | 40 m H07RN-F 3G2.5 | | IP44 |

Made in Germany



The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large rotary handle. They can be used in vertical or horizontal position. Due to the low centre of gravity, the reel is extremely stable.




HEDI cable reel Professional Plus 320

With 1 CEE socket 3x16 A, 2 Schuko sockets and overload protection, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3000TFC | 4003644010240 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K325NTFC | 4003644010301 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K350NTFC | 4003644001811 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K325N2TFC | 4003644010509 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K340N2TFC | 4003644010554 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |

Made in Germany



HEDI cable reel Professional Plus 320

With 3 CEE socket 3x16 A and overload protection, neoprene-rubber cable H07RN-F, for permanent outdoor use


| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|---------------|
| K3000TC | 4003644010295 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K325NTC | 4003644010462 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K350NTC | 4003644010158 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K325N2TC | 4003644010394 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K340N2TC | 4003644010349 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |

Made in Germany



For permanent outdoor use:

HEDI cable reels CEE 3x16 A version with neoprene-rubber cable.



HEDI cable reel Professional Plus 320

With 2 CEE socket 3x16 A and overload protection, residual current device (RCD) 25 / 0.03 A, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3000TCI | 4003644010561 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K325NTCI | 4003644010332 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K350NTCI | 4003644010165 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| K325N2TCI | 4003644010363 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| K340N2TCI | 4003644010578 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |

Made in Germany








The HEDI Professional three-phase AC cable reels are characterized by their high stability, the comfortable carrying handle and the rotation stop switch at the rear. They are equipped with 1 splash-water proof socket CEE 5x16 A 400 V, 2 safety sockets 250 V and 1 overload protection.

For permanent outdoor use:

HEDI three-phase AC cable reels with neoprene-rubber cable.



Made in Germany




HEDI three-phase AC cable reel Professional

Plastic, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|---------------|
| K2YD0016T | 4003644008759 | Empty – for up to 25 m H07RN-F 5G2.5 | – |
| K2YD2016T2 | 4003644011759 | 20 m H07RN-F 5G2.5 | IP44, BGI 608 |
| K2YD2516T2 | 4003644008803 | 25 m H07RN-F 5G2.5 | IP44, BGI 608 |



Made in Germany



HEDI three-phase AC cable reel Professional

Sheet steel, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|--------|
| K2SD0016T | 4003644008698 | Empty – for up to 25 m H07RN-F 5G2.5 | – |
| K2SD2016T2 | 4003644011766 | 20 m H07RN-F 5G2.5 | IP44 |
| K2SD2516T2 | 4003644008735 | 25 m H07RN-F 5G2.5 | IP44 |

The yellow HEDI armoured cable (K35/AT-N07V3V3-F) is a highly flexible and abrasion-resistant cable. Both cable types have been developed for extremely rough operation. Approved for a temperature range of -35°C to +80°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The cable is highly flexible, even at extremely low temperatures, completely weatherproof, oil and acid-resistant, microbe-proof and resistant to embrittlement.



For permanent outdoor use:

HEDI three-phase AC cable reels with armoured cable.




HEDI three-phase AC cable reel Professional

Plastic material, HEDI armoured cable AT-N073V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|--------|
| K2YD2016U2T | 4003644011773 | 20 m AT-N07V3V3-F 5G2.5 | IP44 |
| K2YD2516U2T | 4003644008810 | 25 m AT-N073V3-F 5G2.5 | IP44 |

Made in Germany




HEDI three-phase AC cable reel Professional

Sheet steel, HEDI armoured cable AT-N073V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|--------|
| K2SD2016U2T | 4003644011780 | 20 m AT-N07V3V3-F 5G2.5 | IP44 |
| K2SD2516U2T | 4003644008742 | 25 m AT-N073V3-F 5G2.5 | IP44 |

Made in Germany





The HEDI armoured cable PLUS is a standardized, highly flexible and heavy-duty cable. Approved for a temperature range of -40°C to +90°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). The HEDI armoured cable PLUS is highly flexible, even at temperatures of -40°C. It is completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement.



For permanent outdoor use:

HEDI three-phase AC cable reels with armoured cable PLUS.




HEDI three-phase AC cable reel Professional

Plastic material, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|---------------|
| K2YD2016Q2T | 4003644011797 | 20 m H07BQ-F 5G2.5 | IP44, BGI 608 |
| K2YD2516Q2T | 4003644014743 | 25 m H07BQ-F 5G2.5 | IP44, BGI 608 |

Made in Germany




HEDI three-phase AC cable reel Professional

Sheet steel, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|--------|
| K2SD2016Q2T | 4003644011803 | 20 m H07BQ-F 5G2.5 | IP44 |
| K2SD2516Q2T | 4003644017737 | 25 m H07BQ-F 5G2.5 | IP44 |

Made in Germany






The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large rotary handle. They can be used in vertical or horizontal position. Due to the low centre of gravity, the reel is extremely stable.

For permanent outdoor use:

HEDI cable reels Professional Plus in three-phase AC version, 16 A.




HEDI cable reel Professional Plus 320

With 1 CEE socket 5x16 A 400 V, 2 Schuko sockets 250 V and overload protection, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3D0016T | 4003644011018 | Empty – for up to 33 m H07RN-F 5G2.5 | | – |
| K3D2516T2 | 4003644011094 | 25 m H07RN-F 5G2.5 | | IP44, BGI 608 |
| K3D3316T2 | 4003644011056 | 33 m H07RN-F 5G2.5 | | IP44, BGI 608 |

Made in Germany



HEDI cable reel Professional Plus 320

With 1 CEE socket 5x16 A 400 V, 2 Schuko sockets 250 V and overload protection, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------|
| K3D2516U2T | 4003644011186 | 25 m AT-N07V3V3-F 5G2.5 | | IP44 |
| K3D3316U2T | 4003644011209 | 33 m AT-N07V3V3-F 5G2.5 | | IP44 |

Made in Germany







Made in Germany

HEDI cable reel Professional Plus 320

With 1 CEE socket 5x16 A 400 V, 2 Schuko sockets 250 V and overload protection, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|-----------------------------|---------------|
| K3D2516Q2T | 4003644017768 | 25 m H07BQ-F 5G2.5 | IP44, BGI 608 |
| K3D3316Q2T | 4003644016808 | 33 m H07BQ-F 5G2.5 | IP44, BGI 608 |






The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large rotary handle. They can be used in vertical or horizontal position. Due to the low centre of gravity, the reel is extremely stable.

For permanent outdoor use:

HEDI cable reels Professional Plus in three-phase AC version, 16 A.




HEDI cable reel Professional Plus 320

With 2 CEE sockets 5x16 A 400 V, 1 Schuko socket 250 V and overload protection, neoprene-rubber cable H07RN-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|---------------|
| K3D00162T | 4003644011148 | Empty – for up to 33 m H07RN-F 5G2.5 | | – |
| K3D25162T2 | 4003644011087 | 25 m H07RN-F 5G2.5 | | IP44, BGI 608 |
| K3D33162T2 | 4003644011100 | 33 m H07RN-F 5G2.5 | | IP44, BGI 608 |

Made in Germany



HEDI cable reel Professional Plus 320

With 2 CEE sockets 5x16 A 400 V, 1 Schuko socket 250 V and overload protection, HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|--------|
| K3D25162U2T | 4003644017805 | 25 m AT-N07V3V3-F 5G2.5 | | IP44 |
| K3D33162U2T | 4003644017812 | 33 m AT-N07V3V3-F 5G2.5 | | IP44 |


Made in Germany





HEDI cable reel Professional Plus 320

With 2 CEE sockets 5x16 A, 1 Schuko socket and overload protection, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|---------------|
| K3D25162Q2T | 4003644017843 | 25 m H07BQ-F 5G2.5 | | IP44, BGI 608 |
| K3D33162Q2T | 4003644017850 | 33 m H07BQ-F 5G2.5 | | IP44, BGI 608 |






The Professional Plus plastic cable reels are equipped with an ergonomic carrying handle, a screwable parking brake and a large rotary handle. They can be used in vertical or horizontal position. Due to the low centre of gravity, the reel is extremely stable.

For permanent outdoor use:

HEDI cable reels Professional Plus in three-phase AC version, 32 A.



Made
in
Germany




HEDI cable reel Professional Plus 320

With 1 CEE socket 5x32 A 400 V, 2 Schuko sockets 250 V, overload protection and integrated miniature fuse. With neoprene-rubber cable H07RN-F, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3D0032T | 4003644011124 | Empty – for up to 25 m H07RN-F 5G4.0 | | – |
| K3D2532T4 | 4003644002832 | 25 m H07RN-F 5G4.0 | | IP44, BGI 608 |



Made
in
Germany



HEDI cable reel Professional Plus 320

With 1 CEE socket 5x32 A 400 V, 2 Schuko sockets 250 V, overload protection and integrated miniature fuse. With HEDI armoured cable K35/AT-N07V3V3-F, for permanent outdoor use.


| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------|
| K3D2532UT4 | 4003644002825 | 25 m AT-N07V3V3-F 5G4.0 | | IP44 |



Made
in
Germany

HEDI cable reel Professional Plus 320

With 1 CEE socket 5x32 A 400 V, 2 Schuko sockets 250 V, overload protection and integrated miniature fuse. With HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use.



| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|-----------------------------|---------------|
| K3D2532QT4 | 4003644002818 | 25 m H07BQ-F 5G4.0 | IP44, BGI 608 |





The largest and most robust plastic cable reel from HEDI with a diameter of 450 mm offers a lot of space to accommodate long cables with large cross-sections. Likewise there is sufficient space for the installation of a multitude of sockets and fuses in different combinations on the front side. The strengths of this reel are in the detail. The ergonomic carrying handle, the parking brake in the protective area of the carrying handle or the steel tube base, which is cast into the plastic of the carrying frame, are just a small selection of the special features of this reel.



For permanent outdoor use:

HEDI cable reels Professional Plus in three-phase AC version, 16 A.




■ Version with HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 2 CEE sockets 5x16 A 400 V, 3 Schuko sockets 250 V, overload protection and integrated residual current device (RCD) 40 / 0.03 A, neoprene rubber cable H07RN-F with plug connector CEE 5x16 A 400 V, for permanent outdoor use.



| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|--------------|
| K4003020I | 4003644012435 | Empty – for up to 50 m H07RN-F 5G2.5 | – |
| K4253020I2 | 4003644012107 | 25 m H07RN-F 5G2.5 | IP44, BGI 08 |
| K4503020I2 | 4003644012480 | 50 m H07RN-F 5G2.5 | IP44, BGI 08 |

Made in Germany



■ Version with HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 2 CEE sockets 5x16 A 400 V, 1 CEE socket 3x16 A 250 V, 2 Schuko sockets 250 V, overload protection and integrated residual current device (RCD) 40 / 0.03 A, neoprene rubber cable H07RN-F with plug connector CEE 5x16 A 400 V, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|---------------|
| K4002120I | 4003644012503 | Empty – for up to 50 m H07RN-F 5G2.5 | – |
| K4252120I2 | 4003644012213 | 25 m H07RN-F 5G2.5 | IP44, BGI 608 |
| K4502120I2 | 4003644012060 | 50 m H07RN-F 5G2.5 | IP44, BGI 608 |

Made in Germany






The largest and most robust plastic cable reel from HEDI with a diameter of 450 mm offers a lot of space to accommodate long cables with large cross-sections. Likewise there is sufficient space for the installation of a multitude of sockets and fuses in different combinations on the front side.

For permanent outdoor use:

HEDI cable reels Professional Plus in three-phase AC version, 32 A.



■ Version with HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 1 CEE socket 5x32 A 400 V, 1 CEE socket 5x16 A 400 V, 3 Schuko sockets 250 V, 4 automatic circuit breakers B 16 A, thermostatic circuit-breaker and integrated residual current device (RCD) 40 / 0.03 A, neoprene-rubber cable H07RN-F with plug connector CEE 5x32 A 400 V, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|---------------|
| K40030111 | 4003644012404 | Empty – for up to 33 m H07RN-F 5G4,0 | – |
| K425301114 | 4003644012114 | 25 m H07RN-F 5G4.0 | IP44, BGI 608 |
| K433301114 | 4003644012428 | 33 m H07RN-F 5G4.0 | IP44, BGI 608 |

Made in Germany



■ HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 1 CEE socket 5x32 A 400 V, 1 CEE socket 5x16 A 400 V, 1 CEE socket 3x16 A 250 V, 2 Schuko sockets 250 V, 4 automatic circuit breakers B 16 A, thermostatic circuit-breaker and integrated residual current device (RCD) 40 / 0.03 A, neoprene-rubber cable H07RN-F with plug connector CEE 5x32 A 400 V, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|--------------------------------------|---------------|
| K40021111 | 4003644012565 | Empty – for up to 33 m H07RN-F 5G4,0 | – |
| K425211114 | 4003644001859 | 25 m H07RN-F 5G4.0 | IP44, BGI 608 |
| K433211114 | 4003644017096 | 33 m H07RN-F 5G4.0 | IP44, BGI 608 |

Made in Germany



The strengths of this reel are in the detail. The ergonomic carrying handle, the parking brake in the protective area of the carrying handle or the steel tube base, which is cast into the plastic of the carrying frame, are just a small selection of the special features of this reel.




- Version with HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 2 CEE sockets 5x32 A 400 V, 1 CEE socket 5x16 A 400 V, 2 Schuko sockets 250 V, 4 automatic circuit breakers B 16 A, overload protection and integrated residual current device (RCD) 40 / 0.03 A, neoprene-rubber cable H07RN-F with plug connector CEE 5x32 A 400 V, for permanent outdoor use.



| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|---------------|
| K4002012I | 4003644012589 | Empty – for up to 33 m H07RN-F 5G4,0 | | – |
| K4252012I4 | 4003644012046 | 25 m H07RN-F 5G4.0 | | IP44, BGI 608 |
| K4332012I4 | 4003644012602 | 33 m H07RN-F 5G4.0 | | IP44, BGI 608 |

Made in Germany



- Version with HEDI armoured cable AT-N07V3V3-F or HEDI armoured cable PLUS H07BQ-F on request



HEDI cable reel Professional Plus 450

With 1 CEE socket 5x32 A 400 V, 2 CEE sockets 5x16 A 400 V, 2 Schuko sockets 250 V, 4 automatic circuit breakers B 16 A, overload protection and integrated residual current device (RCD) 40 / 0.03 A, neoprene-rubber cable H07RN-F with plug connector CEE 5x32 A 400 V, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|---------------|
| K4002021I | 4003644002757 | Empty – for up to 33 m H07RN-F 5G4,0 | | – |
| K4252021I4 | 4003644002726 | 25 m H07RN-F 5G4.0 | | IP44, BGI 608 |
| K4332021I4 | 4003644002719 | 33 m H07RN-F 5G4.0 | | IP44, BGI 608 |

Made in Germany





The chassis for the Professional Plus 450 cable reels has proved ideal for transporting the heavy professional cable reels. It permits easy transport even on large construction sites and over long distances.

For easy transport:

HEDI carriage.



HEDI cable reel carriage

| Art. no. | EAN | | Remark |
|----------|---------------|--|--------|
| 9013 | 4003644001873 | | – |








Made of plastic, the cable reel is equipped with an ergonomic carrying handle, screwable parking brake and hinged rotary handle. It can be used in vertical or horizontal position. Due to the low centre of gravity, the reel is extremely stable. It is equipped with 3 VDE-approved Schuko sockets and overload protection or 3 VDE-approved Schuko sockets, overload protection and integrated residual current device (RCD). Connector plugs and sockets are constructed in accordance with protection class IP67.

For permanent use in a wet environment:

HEDI cable reels with pressure-water-tight plugs and sockets.




HEDI cable reel Professional Plus 320

With 3 pressure-water-tight Schuko sockets and neoprene-rubber cable H07RN-F, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|--------------------------------------|--|---------------|
| K3000TD | 4003644010288 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K325NTD | 4003644010325 | 25 m H07RN-F 3G1.5 | | IP65, BGI 608 |
| K350NTD | 4003644010127 | 50 m H07RN-F 3G1.5 | | IP65, BGI 608 |
| K325N2TD | 4003644010523 | 25 m H07RN-F 3G2.5 | | IP65, BGI 608 |
| K340N2TD | 4003644010387 | 40 m H07RN-F 3G2.5 | | IP65, BGI 608 |

Made in Germany



HEDI cable reel Professional Plus 320

With 3 pressure-water-tight Schuko sockets, neoprene-rubber cable H07RN-F, and integrated residual current device (RCD) 25 / 0.03 A for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K3000TDI | 4003644001804 | Empty – for up to 60 m H07RN-F 3G1.5 | | – |
| K325NTDI | 4003644010486 | 25 m H07RN-F 3G1.5 | | IP65, BGI 608 |
| K350NTDI | 4003644010172 | 50 m H07RN-F 3G1.5 | | IP65, BGI 608 |
| K325N2TDI | 4003644010530 | 25 m H07RN-F 3G2.5 | | IP65, BGI 608 |
| K340N2TDI | 4003644010318 | 40 m H07RN-F 3G2.5 | | IP65, BGI 608 |


Made in Germany





Fig.: Similar

Made
in
Germany



HEDI cable reel Professional Plus 450

With 2 pressure-water tight CEE sockets 5x16 A 400 V, 3 pressure-water-tight Schuko sockets 250 V, overload protection and integrated current residual device (RCD) 40 / 0.03 A, neoprene rubber cable H07RN-F, for permanent outdoor use.


| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|---------------|
| K4003020D | 4003644012442 | Empty – for up to 50 m H07RN-F 5G2.5 | | – |
| K4503020D2 | 4003644012473 | 50 m H07RN-F 5G2.5 | | IP65, BGI 608 |



Fig.: Similar

■ Part no. K4253011D +
Part no. K4503011D:
Max. capacity 20 A

Made
in
Germany



HEDI cable reel Professional Plus 450

With 1 pressure-water tight CEE socket 5x32, A 400 V, 1 pressure-water tight CEE socket 5x16 A, 400 V, 3 pressure-water-tight Schuko sockets 250 V, 4 automatic circuit breakers B16 A, overload protection and current residual device (RCD) 40 / 0.03 A, neoprene rubber cable H07RN-F, for permanent outdoor use.

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|---------------|
| K4003011D | 4003644012527 | Empty – for up to 33 m H07RN-F 5G4.0 | | – |
| K4253011D | 4003644012534 | 25 m H07RN-F 5G4.0 | | IP65, BGI 608 |
| K4333011D | 4003644012633 | 33 m H07RN-F 5G4.0 | | IP65, BGI 608 |



The lightweight, but robust StarLite all-plastic device cable reel with PVC cable is designed for use in the home or in a dry environment. The device cable reel is used to extend the cable from the socket to the implement (e. g. lawnmower or hedge trimmer). Due to the low centre of gravity, the reel is extremely stable. The ergonomic carrying handle, the plug parking station, the practical rotation stop switch at the rear of the reel and the thermal protection switch are further features of the HEDI StarLite device cable reel.




Cable reels

For use in a dry environment:

HEDI equipment cable reels with PVC cable.

Cables and extension cables



HEDI equipment cable reel StarLite

PVC cable H05VV-F, black or red, for use in dry environment

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|--------|
| G0Y000T | 4003644009770 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| G0Y25PT | 4003644017904 | 25 m H05VV-F 3G1.5 | | IP20 |
| G0Y25PT01 | 4003644007929 | 25 m H05VV-F 3G1.5, red | | IP20 |
| G0Y35PT | 4003644017911 | 35 m H05VV-F 3G1.5 | | IP20 |
| G0Y35PT01 | 4003644009787 | 35 m H05VV-F 3G1.5, red | | IP20 |
| G0Y40PT | 4003644017928 | 40 m H05VV-F 3G1.5 | | IP20 |
| G0Y40PT01 | 4003644007936 | 40 m H05VV-F 3G1.5, red | | IP20 |
| G0Y50PT | 4003644017935 | 50 m H05VV-F 3G1.5 | | IP20 |
| G0Y50PT01 | 4003644009794 | 50 m H05VV-F 3G1.5, red | | IP20 |



Distributors



Lamps


Accessories



The Primus equipment cable reel in plastic or sheet steel design with PVC cable is designed for the predominant use in private areas or in dry environments. The cable reel extends the cable from the socket to the implement. Due to the low centre of gravity, the reel is extremely stable. The ergonomic carrying handle, the plug parking station, the practical rotation stop switch as well as the overload protection and the grounded sheet steel discs in the sheet steel version are further features of the HEDI Primus equipment cable reel.

For use in a dry environment:

HEDI equipment cable reels with PVC cable.



HEDI equipment cable reel Primus


Plastic version, PVC cable H05VV-F, black or red, for use in a dry environment



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|--------------------------------------|--|--------|
| G1Y000T | 4003644007899 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| G1Y25PT | 4003644017942 | 25 m H05VV-F 3G1.5 | | IP20 |
| G1Y25PT010 | 4003644007882 | 25 m H05VV-F 3G1.5, red | | IP20 |
| G1Y50PT | 4003644017959 | 50 m H05VV-F 3G1.5 | | IP20 |
| G1Y50PT010 | 4003644002405 | 50 m H05VV-F 3G1.5, red | | IP20 |



HEDI equipment cable reel Primus

Sheet steel version, PVC cable H05VV-F, black or red, for use in a dry environment



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|--------------------------------------|--|--------|
| G1S000T | 4003644009800 | Empty – for up to 50 m H05VV-F 3G1.5 | | – |
| G1S25PT | 4003644017966 | 25 m H05VV-F 3G1.5 | | IP20 |
| G1S25PT01 | 4003644009817 | 25 m H05VV-F 3G1.5, red | | IP20 |
| G1S50PT | 4003644017973 | 50 m H05VV-F 3G1.5 | | IP20 |
| G1S50PT01 | 4003644009053 | 50 m H05VV-F 3G1.5, red | | IP20 |


The Primus equipment cable reel in plastic or sheet steel design with rubber cable is designed for short-term outdoor use. The cable reel extends the cable from the socket to the implement. Due to the low centre of gravity, the reel is extremely stable. The ergonomic carrying handle, the plug parking station, the practical rotation stop switch at the rear of the reel, the overload protection and the grounded sheet steel discs in the sheet steel version are further features of the HEDI Primus equipment cable reel.

For short-term outdoor use:

HEDI equipment cable reels with rubber cable.



Made in Germany




HEDI equipment cable reel Primus

Plastic version, rubber cable H05RR-F, for short-term outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| G1Y25GTF | 4003644005062 | 25 m H05RR-F 3G1.5 | | IP44 |
| G1Y50GTF | 4003644009879 | 50 m H05RR-F 3G1.5 | | IP44 |



Made in Germany



HEDI equipment cable reel Primus

Steel-sheet version, rubber cable H05RR-F, for short-term outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| G1S25GTF | 4003644009008 | 25 m H05RR-F 3G1.5 | | IP44 |
| G1S50GTF | 4003644009824 | 50 m H05RR-F 3G1.5 | | IP44 |




The Primus and professional equipment cable reels in plastic or sheet steel design with neoprene-rubber cable are designed for permanent outdoor use. The equipment cable reel is used to extend the cable from the socket to the implement (e. g. on ladders or scaffolds). The equipment cable reel remains at the socket. Only the cable with the splash-water protected coupling must be taken to the workplace. Due to the low centre of gravity, the reel is extremely stable. The ergonomic carrying handle, the plug parking station, the practical rotation

For permanent outdoor use:

HEDI equipment cable reels with neoprene-rubber cable.



Made in Germany




HEDI equipment cable reel Primus

Plastic, neoprene-rubber cable H07RN-F, black or red, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|---------------|
| G1Y25NTF | 4003644008827 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| G1Y25NTF01 | 4003644009206 | 25 m H07RN-F 3G1.5, red | | IP44, BGI 608 |
| G1Y40NTF | 4003644007905 | 40 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| G1Y40NTF010 | 4003644011476 | 40 m H07RN-F 3G1.5, red | | IP44, BGI 608 |



Made in Germany



HEDI equipment cable reel Professional



Plastic version, neoprene-rubber cable H07RN-F, black or red, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|---------------|
| G2Y25NTF | 4003644010936 | 25 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| G2Y25NTF010 | 4003644017980 | 25 m H07RN-F 3G1.5, red | | IP44, BGI 608 |
| G2Y40NTF | 4003644010707 | 40 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| G2Y40NTF010 | 4003644007660 | 40 m H07RN-F 3G1.5, red | | IP44, BGI 608 |
| G2Y50NTF | 4003644008834 | 50 m H07RN-F 3G1.5 | | IP44, BGI 608 |
| G2Y50NTF010 | 4003644018000 | 50 m H07RN-F 3G1.5, red | | IP44, BGI 608 |
| G2Y25N2TF | 4003644018017 | 25 m H07RN-F 3G2.5 | | IP44, BGI 608 |
| G2Y40N2TF | 4003644004911 | 40 m H07RN-F 3G2.5 | | IP44, BGI 608 |

stop switch at the rear of the reel, the overload protection and the grounded sheet steel discs in the sheet steel version are further features of the HEDI Primus and HEDI Professional: equipment cable reels.




Made
in
Germany



HEDI equipment cable reel Primus

Sheet steel version, neoprene-rubber cable H07RN-F, black or red, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|--------|
| G1S25NTF | 4003644009831 | 25 m H07RN-F 3G1.5 | | IP44 |
| G1S25NTF010 | 4003644018024 | 25 m H07RN-F 3G1.5, red | | IP44 |
| G1S40NTF | 4003644009848 | 40 m H07RN-F 3G1.5 | | IP44 |
| G1S40NTF010 | 4003644015276 | 40 m H07RN-F 3G1.5, red | | IP44 |



HEDI equipment cable reel Professional

Sheet steel version, neoprene-rubber cable H07RN-F, black or red, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|--------|
| G2S25NTF | 4003644018031 | 25 m H07RN-F 3G1.5 | | IP44 |
| G2S25NTF01 | 4003644018048 | 25 m H07RN-F 3G1.5, red | | IP44 |
| G2S40NTF | 4003644009947 | 40 m H07RN-F 3G1.5 | | IP44 |
| G2S40NTF010 | 4003644018055 | 40 m H07RN-F 3G1.5, red | | IP44 |
| G2S50NTF | 4003644009954 | 50 m H07RN-F 3G1.5 | | IP44 |
| G2S50NTF010 | 4003644018062 | 50 m H07RN-F 3G1.5, red | | IP44 |
| G2S25N2TF | 4003644010653 | 25 m H07RN-F 3G2.5 | | IP44 |
| G2S40N2TF | 4003644010660 | 40 m H07RN-F 3G2.5 | | IP44 |



Made
in
Germany





Plastic or sheet steel - the equipment cable reel is fitted with ergonomic carrying handle, plug parking station and rotation stop switch at the rear of the reel. The extreme stability due to the low centre of gravity makes vertical and horizontal use possible. The reel also features overload protection and a yellow, highly flexible and abrasion-resistant HEDI armoured cable. The cable has specifically been developed for extremely rough operation.

For permanent outdoor use:

HEDI equipment cable reels with HEDI armoured cable AT-N07V3V3-F.




HEDI equipment cable reel Primus

Plastic version, HEDI armoured cable AT-N07V3V3-F, for permanent use outdoors

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| G1Y25UTF | 4003644009886 | 25 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G1Y40UTF | 4003644009893 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |

Made in Germany




HEDI equipment cable reel Professional

Plastic version, HEDI armoured cable AT-N07V3V3-F, for permanent use outdoors

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| G2Y25UTF | 4003644011278 | 25 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2Y40UTF | 4003644018079 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2Y50UTF | 4003644014378 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2Y25U2TF | 4003644018086 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| G2Y40U2TF | 4003644018093 | 40 m AT-N07V3V3-F 3G2.5 | | IP44 |

Made in Germany



Approved for a temperature range of -35°C to +80°C. Particularly suitable where there is a risk of crushing and abrasion (forklifts and trucks crossing, for example). Even at very low temperatures, it is highly flexible, completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement. In addition, the movable power extension without reel transport is impressive because it stays with the socket and only the cable is taken to the workstation. This is advantageous when working with mobile implements such as gardening tools or on scaffolding.




HEDI equipment cable reel Primus

Steel-sheet version, HEDI armoured cable AT-N07V3V3-F, for permanent use outdoors

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| G1S25UTF | 4003644009855 | 25 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G1S40UTF | 4003644009862 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |

Made in Germany




HEDI equipment cable reel Professional

Steel-sheet version, HEDI armoured cable AT-N07V3V3-F, for permanent use outdoors

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| G2S25UTF | 4003644009961 | 25 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2S40UTF | 4003644009978 | 40 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2S50UTF | 4003644009985 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| G2S25U2TF | 4003644010677 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| G2S40U2TF | 4003644010684 | 40 m AT-N07V3V3-F 3G2.5 | | IP44 |

Made in Germany





Designed in plastic or sheet steel, the equipment cable reel captivates with its ergonomic carrying handle, the plug parking station and the rotation stop switch. It can be used vertically and horizontally, as it is extremely stable due to its low centre of gravity. Additional features: Overload protection and orange HEDI armoured cable PLUS, a standardized, highly flexible and abrasion-resistant cable.

For permanent outdoor use:

HEDI equipment cable reels with HEDI armoured cable PLUS H07BQ-F.




HEDI equipment cable reel Primus

Plastic material, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|---------------|
| G1Y25QTF | 4003644018109 | 25 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| G1Y40QTF | 4003644018116 | 40 m H07BQ-F 3G1.5 | | IP44, BGI 608 |

Made in Germany




HEDI equipment cable reel Professional

Plastic material, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|---------------|
| G2Y25QTF | 4003644018123 | 25 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| G2Y40QTF | 4003644018130 | 40 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| G2Y50QTF | 4003644018147 | 50 m H07BQ-F 3G1.5 | | IP44, BGI 608 |
| G2Y25Q2TF | 4003644018154 | 25 m H07BQ-F 3G2.5 | | IP44, BGI 608 |
| G2Y40Q2TF | 4003644018161 | 40 m H07BQ-F 3G2.5 | | IP44, BGI 608 |

Made in Germany






Made in Germany

HEDI equipment cable reel Primus

Sheet-steel version, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| G1S25QTF | 4003644018178 | 25 m H07BQ-F 3G1.5 | | IP44 |
| G1S40QTF | 4003644018185 | 40 m H07BQ-F 3G1.5 | | IP44 |




Made in Germany

HEDI equipment cable reel Professional

Sheet-steel version, HEDI armoured cable PLUS H07BQ-F, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| G2S25QTF | 4003644018192 | 25 m H07BQ-F 3G1.5 | | IP44 |
| G2S40QTF | 4003644018208 | 40 m H07BQ-F 3G1.5 | | IP44 |
| G2S50QTF | 4003644018215 | 50 m H07BQ-F 3G1.5 | | IP44 |
| G2S25Q2TF | 4003644018222 | 25 m H07BQ-F 3G2.5 | | IP44 |
| G2S40Q2TF | 4003644018239 | 40 m H07BQ-F 3G2.5 | | IP44 |





The plastic version of the scaffold and roofer cable reels is particularly advantageous when handling movable working equipment, for example on roofs or scaffolds. You merely take the cable with the suspending coupling to your workplace. The reel can be put in the shadow near the power source. Depending on the version, the craftsman has 3 or 4 sockets available to connect machines at the workplace.


For permanent outdoor use:

HEDI equipment cable reels with neoprene-rubber cable and rugged suspending coupling.



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Primus


Plastic version, neoprene-rubber cable H07RN-F with heavy-duty 3-fold solid-rubber suspending coupling

| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|-----------------------------|---------------|
| G1Y25NTFHK | 4003644018246 | 25 m H07RN-F 3G1.5 | IP44, BGI 608 |
| G1Y40NTFHK | 4003644010998 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Professional

Plastic version, neoprene-rubber cable H07RN-F with heavy-duty 3-fold solid-rubber suspending coupling


| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|---------------|
| G2Y25NTFHK | 4003644018253 | 25 m H07RN-F 3G1.5 | IP44, BGI 608 |
| G2Y40NTFHK | 4003644012671 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |
| G2Y25N2TFHK | 4003644018260 | 25 m H07RN-F 3G2.5 | IP44, BGI 608 |
| G2Y40N2TFHK | 4003644013746 | 40 m H07RN-F 3G2.5 | IP44, BGI 608 |

Each cable reel is equipped with ergonomic handle, plug parking station, rotation stop switch and overload protection. The reel can be used in vertical or horizontal position. Its low centre of gravity makes it extremely stable.



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Primus


Plastic version, neoprene-rubber cable H07RN-F with 4-fold suspending coupling made from impact-resistant plastic material

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|---------------|
| G1Y25NTK4 | 4003644018277 | 25 m H07RN-F 3G1.5 | IP44, BGI 608 |
| G1Y40NTK4 | 4003644018284 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Professional

Plastic version, neoprene-rubber cable H07RN-F with 4-fold suspending coupling made from impact-resistant plastic material

| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|---------------|
| G2Y25NTK4 | 4003644018291 | 25 m H07RN-F 3G1.5 | IP44, BGI 608 |
| G2Y40NTK4 | 4003644018307 | 40 m H07RN-F 3G1.5 | IP44, BGI 608 |



The steel-sheet version of the scaffold and roofer cable reels is particularly advantageous when handling movable working equipment, for example on roofs or scaffolds. You merely take the cable with the pendant coupling to your workplace. The reel can be put in the shadow near the power source. Depending on the version, the craftsman has 3 or 4 sockets available to connect machines at the workplace.


For permanent outdoor use:

HEDI equipment cable reels with neoprene-rubber cable and rugged suspending coupling.



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Primus



Steel-sheet version, neoprene-rubber cable H07RN-F with heavy-duty 3-fold solid-rubber suspending coupling

| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------|
| G1S25NTFHK | 4003644015900 | 25 m H07RN-F 3G1.5 | | IP44 |
| G1S40NTFHK | 4003644012794 | 40 m H07RN-F 3G1.5 | | IP44 |



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Professional

Steel-sheet version, neoprene-rubber cable H07RN-F with heavy-duty 3-fold solid-rubber suspending coupling


| Art. no. | EAN | Cable length and cable type | | Remark |
|-------------|---------------|-----------------------------|--|--------|
| G2S25NTFHK | 4003644018314 | 25 m H07RN-F 3G1.5 | | IP44 |
| G2S40NTFHK | 4003644015597 | 40 m H07RN-F 3G1.5 | | IP44 |
| G2S25N2TFHK | 4003644018321 | 25 m H07RN-F 3G2.5 | | IP44 |
| G2S40N2TFHK | 4003644013852 | 40 m H07RN-F 3G2.5 | | IP44 |

Each cable reel is equipped with ergonomic handle, plug parking station, rotation stop switch and overload protection. The reel can be used in vertical or horizontal position. Its low centre of gravity makes it extremely stable.



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Primus


Steel-sheet version, neoprene-rubber cable H07RN-F with 4-fold suspending coupling made from impact-resistant plastic material

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| G1S25NTK4 | 4003644018338 | 25 m H07RN-F 3G1.5 | | IP44 |
| G1S40NTK4 | 4003644018345 | 40 m H07RN-F 3G1.5 | | IP44 |



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany



HEDI equipment cable reel Professional

Steel-sheet version, neoprene-rubber cable H07RN-F with 4-fold suspending coupling made from impact-resistant plastic material


| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| G2S25NTK4 | 4003644018352 | 25 m H07RN-F 3G1.5 | | IP44 |
| G2S40NTK4 | 4003644018369 | 40 m H07RN-F 3G1.5 | | IP44 |



For special applications, HEDI offers empty prime-quality cable reels that can be configured as required. We offer all special configurations upon request.

For special applications:


HEDI empty cable reels for individual assembly.



HEDI empty reel StarLite

Made in Germany


| Art. no. | EAN | Remark |
|----------|---------------|--------------|
| G0Y000 | 4003644018376 | Plastic reel |



HEDI empty reel Primus

Made in Germany


| Art. no. | EAN | Remark |
|----------|---------------|------------------|
| G1Y000 | 4003644010950 | Plastic reel |
| G1S000 | 4003644006526 | Steel-sheet reel |



HEDI empty reel Professional

Made in Germany


| Art. no. | EAN | Remark |
|----------|---------------|------------------|
| G2Y000 | 4003644005819 | Plastic reel |
| G2S000 | 4003644013661 | Steel-sheet reel |



HEDI empty reel Professional Plus 320

Made
in
Germany

| Art. no. | EAN | Remark |
|----------|---------------|--------------|
| G3000 | 4003644013074 | Plastic reel |



HEDI empty reel Professional Plus 450

Made
in
Germany

| Art. no. | EAN | Remark |
|----------|---------------|--------------|
| G4000 | 4003644012268 | Plastic reel |






The compressed-air hose reels in plastic or steel-sheet version are delivered with bush socket and quick-release coupling. Optionally, they can be equipped with a distributor. They are also equipped with an ergonomic carrying handle and a rotation stop switch. The reel can be used in vertical or horizontal position. Its low centre of gravity makes it extremely stable.

For highest demands:

HEDI compressed-air hose reels.



Made
in
Germany




HEDI compressed-air hose reel Primus

Plastic and steel-sheet version, fabric-reinforced PVC hose, up to 12 bars, with distributor

| Art. no. | EAN | Hose length and dimension | | Version |
|----------|---------------|---------------------------|--|------------------|
| K1Y20LV9 | 4003644009596 | 20 m, 9/2.5 mm | | Plastic material |
| K1S20LV9 | 4003644009046 | 20 m, 9/2.5 mm | | Sheet steel |



Made
in
Germany




HEDI compressed-air hose reel Primus

Plastic and steel-sheet version, fabric-reinforced PVC hose, up to 12 bars, without distributor

| Art. no. | EAN | Hose length and dimension | | Version |
|----------|---------------|---------------------------|--|------------------|
| K1Y20L9 | 4003644009565 | 20 m, 9/2.5 mm | | Plastic material |
| K1S20L9 | 4003644009558 | 20 m, 9/2.5 mm | | Sheet steel |



Made
in
Germany




HEDI compressed-air hose reel Professional

Plastic and steel-sheet version, fabric-reinforced PVC hose, up to 12 bars, with distributor

| Art. no. | EAN | Hose length and dimension | | Version |
|----------|---------------|---------------------------|--|------------------|
| K2Y20LV9 | 4003644009091 | 20 m, 9/2.5 mm | | Plastic material |
| K2S20LV9 | 4003644009633 | 20 m, 9/2.5 mm | | Sheet steel |



Made
in
Germany



HEDI compressed-air hose reel Professional

Plastic and steel-sheet version, fabric-reinforced PVC hose, up to 12 bars, without distributor

| Art. no. | EAN | Hose length and dimension | | Version |
|----------|---------------|---------------------------|--|------------------|
| K2Y20L9 | 4003644009084 | 20 m, 9/2.5 mm | | Plastic material |
| K2S20L9 | 4003644009626 | 20 m, 9/2.5 mm | | Sheet steel |



The spring-loaded reels in compressed-air or electrical version are characterized by a rugged closed housing for use in areas that are exposed to dust and dirt. Its hinged bracket, that can be swivelled through 150°, can be installed at a wall or a ceiling. The locking system permits the compressed-air hose / electrical cable to be locked in virtually any position. A light pull at hose / cable releases the lock. This permits hose or cable to be wound up rapidly after use.

Practical for industry and workshop:

HEDI spring-loaded cable reels.



- Dimensions: Length with bracket 32.5 cm / height 27.5 cm / depth 18.5 cm
- Connecting cable: approx. 1.3 meters H05VV-F 3G1.5 with plug
- with overload protection
- maximum capacity with coiled-up cable: 800 W / with uncoiled cable: 2,000 W

Made
in
Germany



HEDI spring-loaded cable reels

Electrical version, PVC cable H05VV-F 3G1.5

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| KBZ10PT | 4003644016617 | 10 m H05VV-F 3G1.5 | | IP20 |
| KBZ15PT | 4003644016624 | 15 m H05VV-F 3G1.5 | | IP20 |



- Dimensions: Length with bracket 32.5 cm / height 27.5 cm / depth 18.5 cm
- Connecting cable: approx. 1.3 meters H07RN-F 3G1.5 with plug
- with overload protection
- maximum capacity with coiled-up cable: 800 W / with uncoiled cable: 2,000 W

Made
in
Germany



HEDI spring-loaded cable reels

Electrical version, neoprene-rubber cable H07RN-F 3G1.5

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| KBZ10NT | 4003644016631 | 10 m H07RN-F 3G1.5 | | IP24 |
| KBZ15NT | 4003644016648 | 15 m H07RN-F 3G1.5 | | IP24 |



- Dimensions: Length with bracket 45 cm / height 36.1 cm / depth 20.8 cm
- Connecting cable: approx. 1.5 metres H07RN-F 5G1.5 or 5G2.5 with plug (see table)
- with overload protection
- maximum capacity KBZD2016T: with coiled-up cable: 1,000 W / with uncoiled cable: 3,000 W
- maximum capacity KBZD15162T: with coiled-up cable: 2,800 W / with uncoiled cable: 5,000 W



- Dimensions: Length with bracket 32.5 cm / height 27.5 cm / depth 18.5 cm
- Connecting hose: approx. 1 metre long

HEDI spring-loaded cable reels

Three-phase AC version. Neoprene-rubber cable H07RN-F


| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------|
| KBZD2016T | 4003644000401 | 20 m H07RN-F 5G1.5 | | IP24 |
| KBZD15162T | 4003644000418 | 15 m H07RN-F 5G2.5 | | IP24 |



HEDI spring-loaded cable reels

Compressed-air version, fabric-reinforced PVC hose, up to 10 bars

| Art. no. | EAN | Hose length and dimension | | Remark |
|----------|---------------|---------------------------|--|--------|
| KBZ09L8 | 4003644016600 | 9 m, 8 x 12 mm dia. | | — |

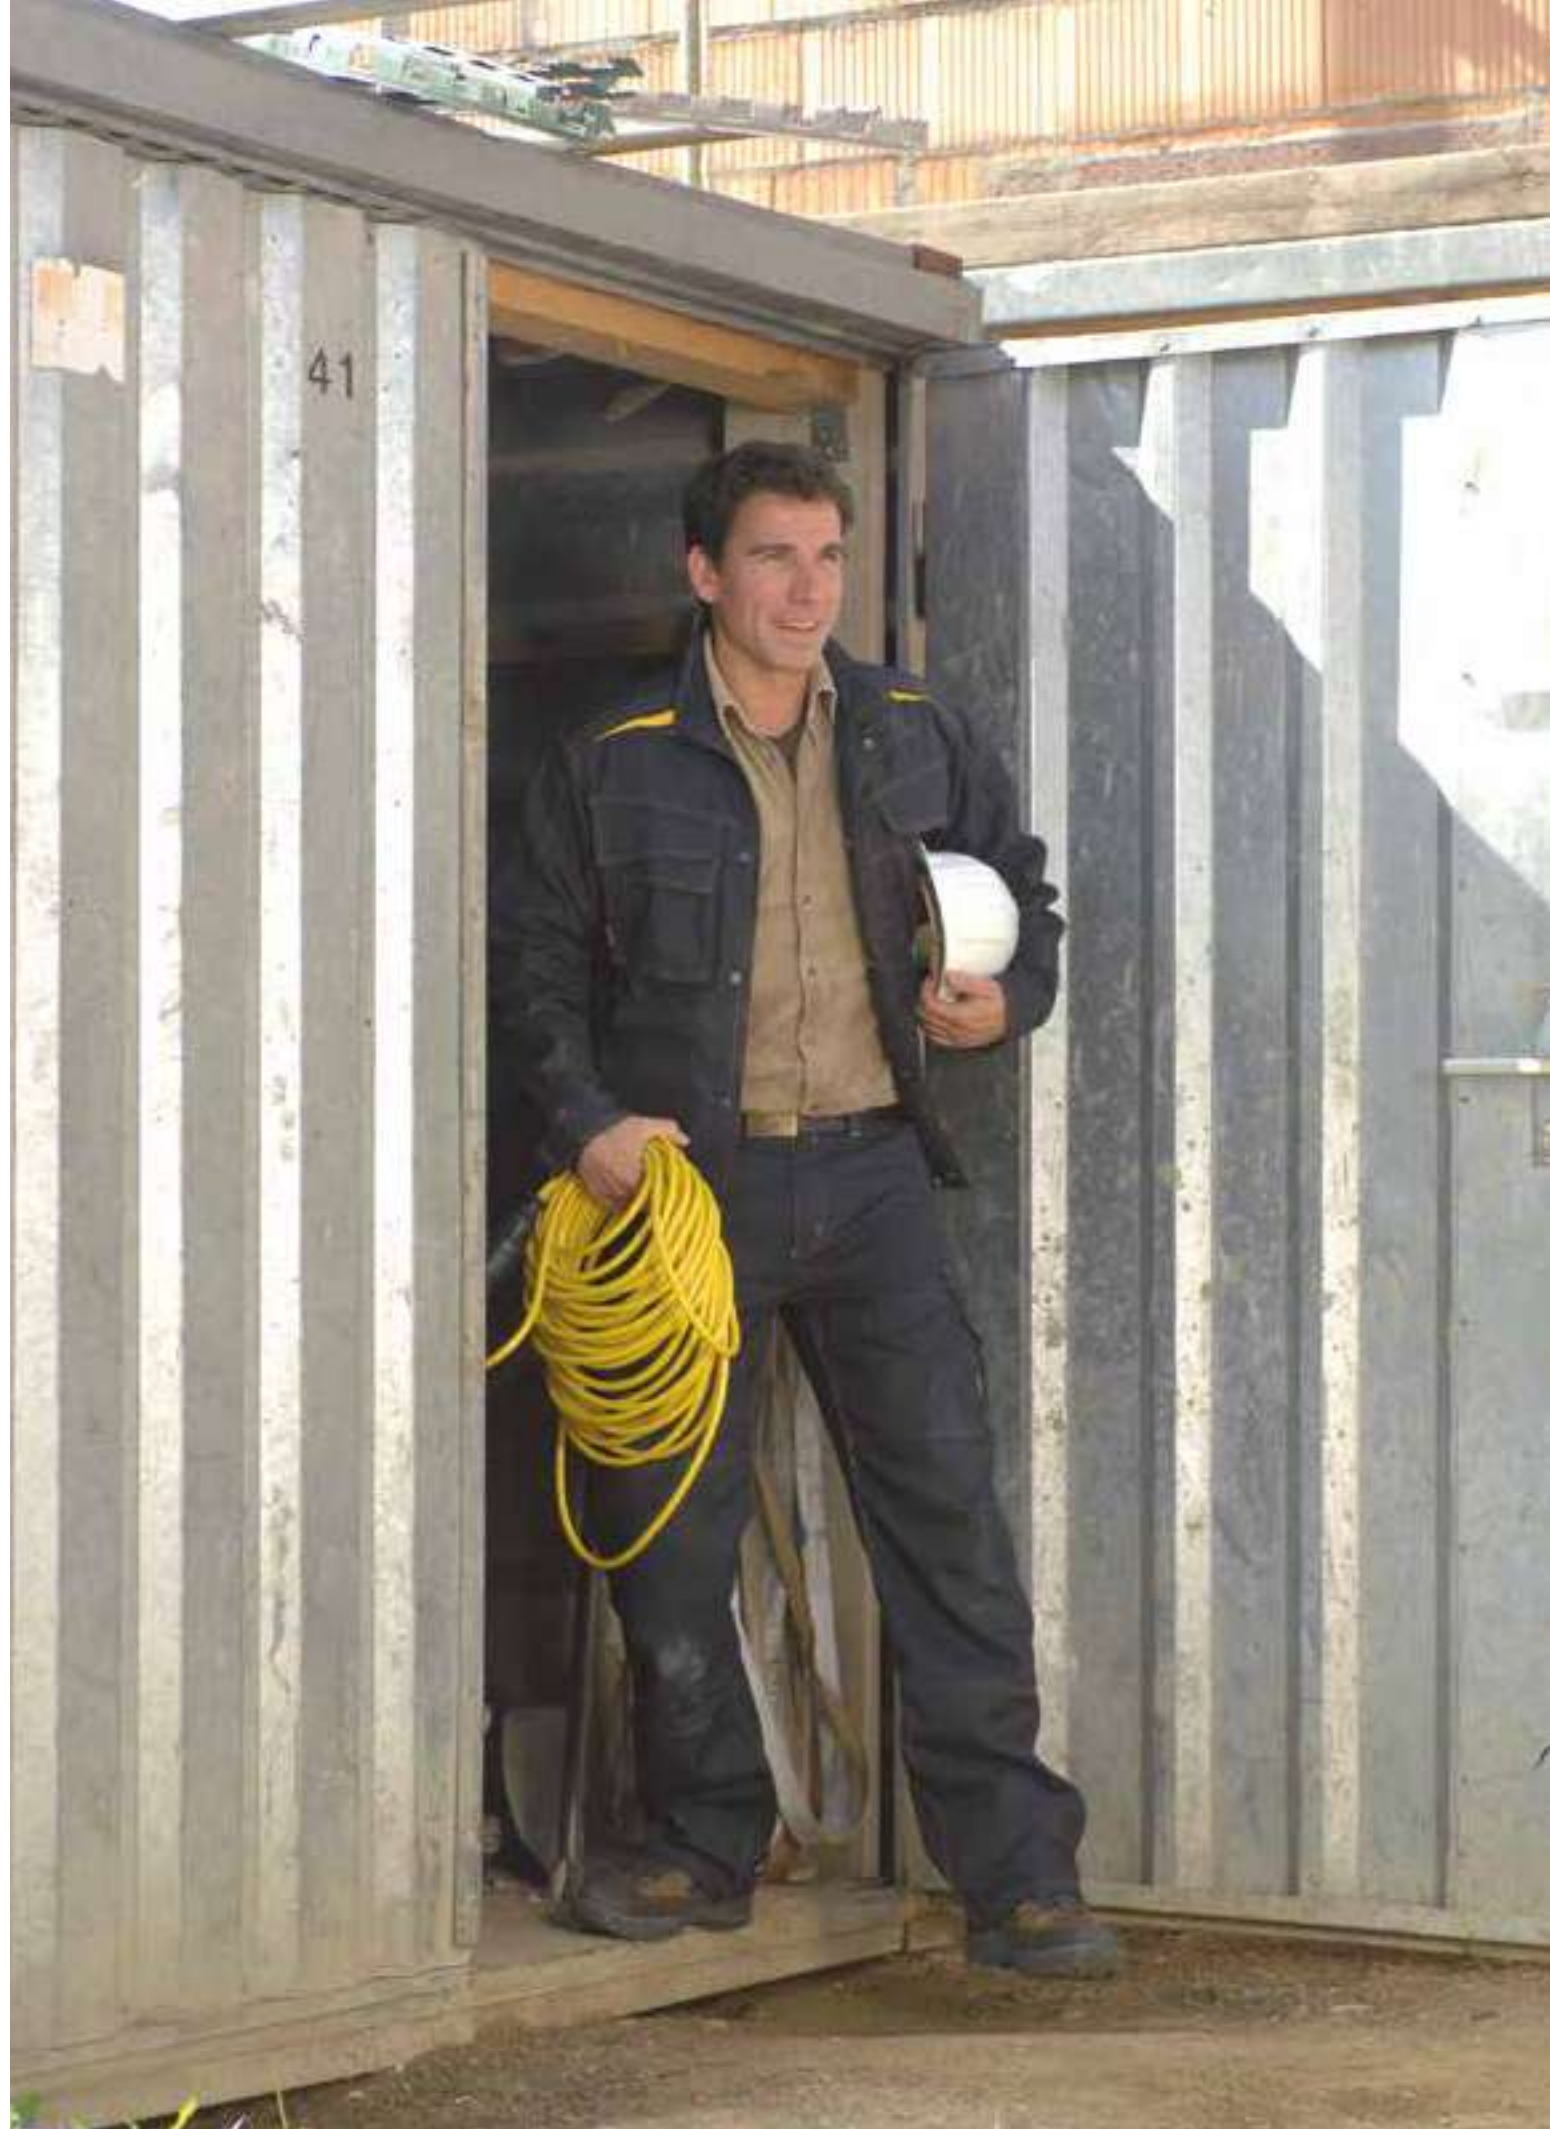

Concentrated power and safety:

HEDI cables and extensions cables

The right cable for all fields of application. From private use in a dry environment up to heavy-duty applications on construction sites.

To improve your protection, they are also available with installed protective equipment.

PRCD-S, for example, is a mobile protective device that is installed in electrical feeders. It detects residual current and interrupts the current inside a very short time. The PRCD-S can be installed in appliance cords, extension cables and cable reels.

Special cables, such as the HEDI SpiralPlus permit easy and swift working without pitfalls. The coiled cable has a basic length of one metre and can easily be extended up to a working length of five metres.

Highest demands can be satisfied with the extension cables in one-phase and three-phase AC version, the HEDI armoured cable and the armoured cable PLUS.

Our best-selling cables are also available by the metre for customized assembly. You can select any length you want. Cutting is at no costs.

The range includes:

| | Page |
|---|-------|
| ■ Extension cables | 76-78 |
| ■ Extension cables with suspending coupling | 79 |
| ■ Protective devices / Extension cables with protective devices | 80-83 |
| ■ SpiralPlus | 84 |
| ■ Extension cables / three.-phase AC version | 85-90 |
| ■ Compressed-air hose extensions | 90 |
| ■ Machine connecting cable | 91 |
| ■ Cut-to-order lengths | 92-93 |



Made in Germany



These extension cables in different cable qualities in 250-V AC version with Schuko plug and Schuko socket are suitable for different fields of application.

For all applications:

Extension cables in AC version.

PVC extension cable

Black, for use in a dry environment



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5P | 4003644005895 | 5 m H05VV-F 3G1.5 | | IP20 |
| VK10P | 4003644003037 | 10 m H05VV-F 3G1.5 | | IP20 |
| VK25P | 4003644003105 | 25 m H05VV-F 3G1.5 | | IP20 |
| VK50P | 4003644003211 | 50 m H05VV-F 3G1.5 | | IP20 |

PVC extension cable

Red, for use in a dry environment



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5P01 | 4003644005901 | 5 m H05VV-F 3G1.5 | | IP20 |
| VK10P01 | 4003644003051 | 10 m H05VV-F 3G1.5 | | IP20 |
| VK25P01 | 4003644003129 | 25 m H05VV-F 3G1.5 | | IP20 |
| VK50P01 | 4003644003235 | 50 m H05VV-F 3G1.5 | | IP20 |

Rubber extension cable

Black, for short-term outdoor use



Made
in
Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5G | 4003644003457 | 5 m H05RR-F 3G1.5 | | IP44 |
| VK10G | 4003644003013 | 10 m H05RR-F 3G1.5 | | IP44 |
| VK25G | 4003644003082 | 25 m H05RR-F 3G1.5 | | IP44 |
| VK50G | 4003644003198 | 50 m H05RR-F 3G1.5 | | IP44 |

Neoprene-rubber extension cable

Black, for permanent outdoor use



Made in Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5NF | 4003644003327 | 5 m H07RN-F 3G1.5 | | IP44 |
| VK10NF | 4003644003501 | 10 m H07RN-F 3G1.5 | | IP44 |
| VK15NF | 4003644005963 | 15 m H07RN-F 3G1.5 | | IP44 |
| VK25NF | 4003644003495 | 25 m H07RN-F 3G1.5 | | IP44 |
| VK50NF | 4003644003440 | 50 m H07RN-F 3G1.5 | | IP44 |
| VK10N2F | 4003644003266 | 10 m H07RN-F 3G2.5 | | IP44 |
| VK15N2F | 4003644005871 | 15 m H07RN-F 3G2.5 | | IP44 |
| VK25N2F | 4003644003273 | 25 m H07RN-F 3G2.5 | | IP44 |
| VK50N2F | 4003644018390 | 50 m H07RN-F 3G2.5 | | IP44 |

Neoprene-rubber extension cable

Red, for permanent outdoor use



Made in Germany



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5NF01 | 4003644015306 | 5 m H07RN-F 3G1.5 | | IP44 |
| VK10NF01 | 4003644003280 | 10 m H07RN-F 3G1.5 | | IP44 |
| VK15NF01 | 4003644003334 | 15 m H07RN-F 3G1.5 | | IP44 |
| VK25NF01 | 4003644003471 | 25 m H07RN-F 3G1.5 | | IP44 |
| VK50NF01 | 4003644003259 | 50 m H07RN-F 3G1.5 | | IP44 |



The high-quality cables of the individual HEDI armoured cable are also available as extension cables for demanding applications. Built as 250-V AC cable with Schuko plug and Schuko socket.

For demanding applications:

Extension cables in one-phase AC version.



HEDI armoured cable extension

K35/AT-N07V3V3-F, yellow, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5UF | 4003644007745 | 5 m AT-N07V3V3-F 3G1.5 | | IP44 |
| VK10UF | 4003644007561 | 10 m AT-N07V3V3-F 3G1.5 | | IP44 |
| VK15UF | 4003644005970 | 15 m AT-N07V3V3-F 3G1.5 | | IP44 |
| VK25UF | 4003644007578 | 25 m AT-N07V3V3-F 3G1.5 | | IP44 |
| VK50UF | 4003644007585 | 50 m AT-N07V3V3-F 3G1.5 | | IP44 |
| VK10U2F | 4003644007592 | 10 m AT-N07V3V3-F 3G2.5 | | IP44 |
| VK15U2F | 4003644004843 | 15 m AT-N07V3V3-F 3G2.5 | | IP44 |
| VK25U2F | 4003644007608 | 25 m AT-N07V3V3-F 3G2.5 | | IP44 |
| VK50U2F | 4003644011377 | 50 m AT-N07V3V3-F 3G2.5 | | IP44 |

Made
in
Germany



HEDI armoured cable extension cable PLUS

Armoured cable PLUS (H07BQ-F), orange for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5QF | 4003644015566 | 5 m H07BQ-F 3G1.5 | | IP44 |
| VK10QF | 4003644015603 | 10 m H07BQ-F 3G1.5 | | IP44 |
| VK15QF | 4003644018406 | 15 m H07BQ-F 3G1.5 | | IP44 |
| VK25QF | 4003644015917 | 25 m H07BQ-F 3G1.5 | | IP44 |
| VK50QF | 4003644016914 | 50 m H07BQ-F 3G1.5 | | IP44 |
| VK10Q2F | 4003644016136 | 10 m H07BQ-F 3G2.5 | | IP44 |
| VK15Q2F | 4003644016242 | 15 m H07BQ-F 3G2.5 | | IP44 |
| VK25Q2F | 4003644016815 | 25 m H07BQ-F 3G2.5 | | IP44 |
| VK50Q2F | 4003644016921 | 50 m H07BQ-F 3G2.5 | | IP44 |

Made
in
Germany



The extension cables with suspending coupling are ideal for demanding applications. The best example is the application on roofs and scaffolds.



Cable reels

For demanding applications:

Extension cables with suspending coupling.

Cables and extension cables

Neoprene-rubber extension cable

With rugged 4-fold suspending coupling, for permanent outdoor use



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK1,5NK4 | 4003644014996 | 1.5 m H07RN-F 3G1.5 | | IP44 |
| VK5NK4 | 4003644014989 | 5 m H07RN-F 3G1.5 | | IP44 |
| VK10NK4 | 4003644015009 | 10 m H07RN-F 3G1.5 | | IP44 |
| VK15NK4 | 4003644015979 | 15 m H07RN-F 3G1.5 | | IP44 |
| VK25NK4 | 4003644015078 | 25 m H07RN-F 3G1.5 | | IP44 |



Distributors

Neoprene-rubber extension cable

With rugged 3-fold suspending coupling made from solid rubber, for permanent outdoor use



■ Versions with armoured cable and armoured cable PLUS on request.

Made in Germany

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5-HK | 4003644003181 | 5 m H07RN-F 3G1.5 | | IP44 |
| VK10-HK | 4003644003402 | 10 m H07RN-F 3G1.5 | | IP44 |
| VK25-HK | 4003644003419 | 25 m H07RN-F 3G1.5 | | IP44 |
| VK10-HK2 | 4003644007615 | 10 m H07RN-F 3G2.5 | | IP44 |
| VK25-HK2 | 4003644003358 | 25 m H07RN-F 3G2.5 | | IP44 |



Lamps

Accessories



The extension cables in different (high-quality) cable grades and in 250-V AC version are ideal for demanding applications. To protect your health and life, these cables are equipped with protective devices.

For your safety:

Protective devices / Extension cables with protective devices.



Protective elbow plug

PRCD, for permanent outdoor use

Description:

This protective plug reliably protects against dangerous electrical shocks. It detects residual current and interrupts the current inside a very short time. The plug can be installed in appliance cords, extension cables and cable reels.

Fields of application:

■ Household, garden, workshop, industry

Technical specifications:

- Voltage and current: 230 V / 16 A
- Rated tripping current: 30 mA
- Tripping time: < 30 ms



- We should be pleased to install this protective plug on our cable reels and extension cables on request.

| Art. no. | EAN | Description | | Remark |
|----------|---------------|-----------------------|--|--------|
| 9034 | 4003644018413 | Protective elbow plug | | IP44 |



Neoprene-rubber extension cable

With protective elbow plug (PRCD), for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------|
| VK5NFI | 4003644005031 | 5 m H07RN-F 3G1.5 | | IP44 |
| VK10NFI | 4003644018420 | 10 m H07RN-F 3G1.5 | | IP44 |
| VK25NFI | 4003644018437 | 25 m H07RN-F 3G1.5 | | IP44 |



- Versions with the HEDI armoured cable and armoured cable PLUS on request.

Made in Germany





Neoprene-rubber extension cable

With protective elbow plug (PRCD) and suspending coupling, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|----------|---------------|-----------------------------|--|--------------|
| VK5HKI | 4003644007691 | 5 m H07RN-F 3G1.5 | | 3-fold, IP44 |
| VK5NK4I | 4003644018444 | 5 m H07RN-F 3G1.5 | | 4-fold, IP44 |
| VK10HKI | 4003644004867 | 10 m H07RN-F 3G1.5 | | 3-fold, IP44 |
| VK10NK4I | 4003644018451 | 10 m H07RN-F 3G1.5 | | 4-fold, IP44 |
| VK25HKI | 4003644018468 | 25 m H07RN-F 3G1.5 | | 3-fold, IP44 |
| VK25NK4I | 4003644018475 | 25 m H07RN-F 3G1.5 | | 4-fold, IP44 |

Made in Germany



■ Versions with the HEDI armoured cable and armoured cable PLUS on request.





The PRCD-S is a mobile protective device that is installed in electrical feeders. It detects residual current and interrupts the current inside a very short time. In addition, the PRCD-S continuously monitors the proper functioning of the currently used socket, in particular the protective ground conductor.

For your safety:

Protective devices / Extension cables with protective device PRCD-S.



Mobile safety devices

PRCD-S, for permanent outdoor use

Description:

The PRCD-S is a mobile protective device that is installed in electrical feeders. It detects residual current and interrupts the current inside a very short time. In addition, the PRCD-S continuously monitors the proper functioning of the currently used socket, in particular the protective ground conductor. The PRCD-D thus permits only safe sockets to be used for current consumption. The PRCD-S can be installed in appliance cords, extension cables and cable reels.

Fields of application:

- Workshop, industry, construction site

Technical specifications:

- Voltage and current: 230 V / 16 A
- Rated tripping current: 30 mA
- Tripping time: < 30 mS

| Art. no. | EAN | Description | Remark |
|----------|---------------|-------------|--------|
| 9033 | 4003644018482 | PRCD-S | IP55 |



- Stipulated by the Professional Association for work on German construction and installation sites.
- We should be pleased to install the PRCD-S on our cable reels and extension cables on request.



Neoprene-rubber extension cable

With protective circuit-breaker (PRCD-S), for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | Remark |
|-------------|---------------|-----------------------------|--------|
| VK3NPRCD-S | 4003644014798 | 3 m H07RN-F 3G1.5 | IP44 |
| VK3N2PRCD-S | 4003644008438 | 3 m H07RN-F 3G2.5 | IP44 |



- Versions with the HEDI armoured cable and armoured cable PLUS on request.

Made in Germany



The PRCD-D thus permits only safe sockets to be used for current consumption. We should be pleased to install the PRCD-S in your cable reels, appliance cords and extension cables on request.



Neoprene-rubber extension cable

With personal safety switch (PRCD-S), for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|--------------|---------------|-----------------------------|--|--------------|
| VK3-HKPRCD-S | 4003644018499 | 3 m H07RN-F 3G1.5 | | 3-fold, IP44 |
| VK3NK4PRCD-S | 4003644018505 | 3 m H07RN-F 3G1.5 | | 4-fold, IP44 |

■ Versions with the HEDI armoured cable and armoured cable PLUS on request.

Made in Germany



Notes: – We should be pleased to follow your individual specifications to configure cable reels with PRCD-S. Please contact us!
– A distributor with PRCD-S is shown on page 99 (art. no. KVM4000PRCD-S)





HEDI SpiralPlus permits easy and swift working without pitfalls. The coiled cable has a basic length of one metre and can easily be extended up to a working length of five metres. When it is not used, the excellent spring effect contracts the cable completely.

Practical for industry and workshop:

HEDI SpiralPlus.



HEDI SpiralPlus

Coiled HEDI armoured cable PLUS (H07BQ-F) for applications in industry and workshop

Description:

- Basic length 1 metre
- Working length up to 5 metres
- Outer spiral diameter approx. 32 mm
- The scope of delivery includes 2 cable grips for installation at the socket, for example

| Art. no. | EAN | Cable type | Plug/coupling |
|----------|---------------|---------------|---------------|
| VKS315 | 4003644005741 | H07BQ-F 3G1.5 | Schuko/1-fold |
| VKS315HK | 4003644005734 | H07BQ-F 3G1.5 | Schuko/3-fold |



Three-phase AC extension cables 400 V / 5x16 A in the cable versions H07RN-F and with the HEDI armoured cable (K35) are approved for permanent outdoor use.

For permanent outdoor use:

Extension cables in three-phase AC version, 16 A.



Three-phase AC extension cable

Neoprene rubber cable H07RN-F, black, 5x16 A, for permanent outdoor use

| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------------------------|
| VKD1016 | 4003644007011 | 10 m H07RN-F 5G1.5 | | – |
| VKD1016F | 4003644018512 | 10 m H07RN-F 5G1.5 | | With phase reversal plug |
| VKD2516 | 4003644007042 | 25 m H07RN-F 5G1.5 | | – |
| VKD2516F | 4003644016396 | 25 m H07RN-F 5G1.5 | | With phase reversal plug |
| VKD5016 | 4003644007073 | 50 m H07RN-F 5G1.5 | | – |
| VKD5016F | 4003644018536 | 50 m H07RN-F 5G1.5 | | With phase reversal plug |
| VKD10162 | 4003644007103 | 10 m H07RN-F 5G2.5 | | – |
| VKD10162F | 4003644016938 | 10 m H07RN-F 5G2.5 | | With phase reversal plug |
| VKD25162 | 4003644007097 | 25 m H07RN-F 5G2.5 | | – |
| VKD25162F | 4003644016389 | 25 m H07RN-F 5G2.5 | | With phase reversal plug |
| VKD50162 | 4003644007110 | 50 m H07RN-F 5G2.5 | | – |
| VKD50162F | 4003644018543 | 50 m H07RN-F 5G2.5 | | With phase reversal plug |



Three-phase AC extension cable

HEDI armoured cable (K35/AT-N07V3V3-F), yellow, 5x16 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------------------------|
| VKD1016U | 4003644007257 | 10 m AT-N07V3V3-F 5G1.5 | | – |
| VKD1016UF | 4003644018550 | 10 m AT-N07V3V3-F 5G1.5 | | With phase reversal plug |
| VKD2516U | 4003644007233 | 25 m AT-N07V3V3-F 5G1.5 | | – |
| VKD2516UF | 4003644018567 | 25 m AT-N07V3V3-F 5G1.5 | | With phase reversal plug |
| VKD5016U | 4003644013463 | 50 m AT-N07V3V3-F 5G1.5 | | – |
| VKD5016UF | 4003644018574 | 50 m AT-N07V3V3-F 5G1.5 | | With phase reversal plug |
| VKD1016U2 | 4003644007301 | 10 m AT-N07V3V3-F 5G2.5 | | – |
| VKD1016U2F | 4003644018581 | 10 m AT-N07V3V3-F 5G2.5 | | With phase reversal plug |
| VKD2516U2 | 4003644007271 | 25 m AT-N07V3V3-F 5G2.5 | | – |
| VKD2516U2F | 4003644018598 | 25 m AT-N07V3V3-F 5G2.5 | | With phase reversal plug |
| VKD5016U2 | 4003644000913 | 50 m AT-N07V3V3-F 5G2.5 | | – |
| VKD5016U2F | 4003644018604 | 50 m AT-N07V3V3-F 5G2.5 | | With phase reversal plug |





The extremely rugged three-phase AC extension cables 400 V / 5x16 A, manufactured from the HEDI armoured cable PLUS, are used in particular in areas where they are exposed to exceptionally high mechanical stress (crossing lorries, for example).

For permanent outdoor use:

Extension cables in three-phase AC version, 16 A.



Three-phase AC extension cable

HEDI armoured cable PLUS (H07BQ-F), orange, 5x16 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|--------------------------|
| VKD1016Q | 4003644015511 | 10 m H07BQ-F 5G1.5 | | – |
| VKD1016QF | 4003644018611 | 10 m H07BQ-F 5G1.5 | | With phase reversal plug |
| VKD2516Q | 4003644016174 | 25 m H07BQ-F 5G1.5 | | – |
| VKD2516QF | 4003644018628 | 25 m H07BQ-F 5G1.5 | | With phase reversal plug |
| VKD5016Q | 4003644016860 | 50 m H07BQ-F 5G1.5 | | – |
| VKD5016QF | 4003644018635 | 50 m H07BQ-F 5G1.5 | | With phase reversal plug |
| VKD1016Q2 | 4003644015849 | 10 m H07BQ-F 5G2.5 | | – |
| VKD1016Q2F | 4003644018642 | 10 m H07BQ-F 5G2.5 | | With phase reversal plug |
| VKD2516Q2 | 4003644016822 | 25 m H07BQ-F 5G2.5 | | – |
| VKD2516Q2F | 4003644018659 | 25 m H07BQ-F 5G2.5 | | With phase reversal plug |
| VKD5016Q2 | 4003644018666 | 50 m H07BQ-F 5G2.5 | | – |
| VKD5016Q2F | 4003644018673 | 50 m H07BQ-F 5G2.5 | | With phase reversal plug |



Three-phase AC extension cables 400 V / 5x32 A in H07RN-F cable quality are mainly used at construction and installation sites.

For permanent outdoor use:

Extension cables in three-phase AC version, 32 A.

Three-phase AC extension cable

Neoprene rubber cable H07RN-F, black, 5x32 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | Remark |
|-----------|---------------|-----------------------------|---|
| VKD1032 | 4003644007028 | 10 m H07RN-F 5G2.5 | Max. capacity 20 A |
| VKD1032F | 4003644007035 | 10 m H07RN-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD2532 | 4003644007059 | 25 m H07RN-F 5G2.5 | Max. capacity 20 A |
| VKD2532F | 4003644007066 | 25 m H07RN-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD5032 | 4003644007080 | 50 m H07RN-F 5G2.5 | Max. capacity 20 A |
| VKD5032F | 4003644018680 | 50 m H07RN-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD10324 | 4003644007288 | 10 m H07RN-F 5G4.0 | – |
| VKD10324F | 4003644018697 | 10 m H07RN-F 5G4.0 | With phase reversal plug |
| VKD25324 | 4003644007127 | 25 m H07RN-F 5G4.0 | – |
| VKD25324F | 4003644018703 | 25 m H07RN-F 5G4.0 | With phase reversal plug |
| VKD50324 | 4003644007134 | 50 m H07RN-F 5G4.0 | – |
| VKD50324F | 4003644018710 | 50 m H07RN-F 5G4.0 | With phase reversal plug |
| VKD10326 | 4003644018727 | 10 m H07RN-F 5G4.0 | – |
| VKD10326F | 4003644018734 | 10 m H07RN-F 5G4.0 | With phase reversal plug |
| VKD25326 | 4003644007141 | 25 m H07RN-F 5G4.0 | – |
| VKD25326F | 4003644018741 | 25 m H07RN-F 5G4.0 | With phase reversal plug |
| VKD50326 | 4003644007158 | 50 m H07RN-F 5G4.0 | – |
| VKD50326F | 4003644018758 | 50 m H07RN-F 5G4.0 | With phase reversal plug |





Highest demands can be satisfied with the extension cables in three-phase AC version 400 V / 5x32 A, the HEDI armoured cable and the armoured cable PLUS.

For permanent outdoor use:

Extension cables in three-phase AC version, 32 A.



Three-phase AC extension cable

HEDI armoured cable (K35/AT-N07V3V3-F), yellow, 5x32 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | Remark |
|------------|---------------|-----------------------------|---|
| VKD1032U | 4003644007264 | 10 m AT-N07V3V3-F 5G2.5 | Max. capacity 20 A |
| VKD1032UF | 4003644018765 | 10 m AT-N07V3V3-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD2532U | 4003644007240 | 25 m AT-N07V3V3-F 5G2.5 | Max. capacity 20 A |
| VKD2532UF | 4003644018772 | 25 m AT-N07V3V3-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD5032U | 4003644000906 | 50 m AT-N07V3V3-F 5G2.5 | Max. capacity 20 A |
| VKD5032UF | 4003644018789 | 50 m AT-N07V3V3-F 5G2.5 | With phase reversal plug max. capacity 20 A |
| VKD1032U4 | 4003644013388 | 10 m AT-N07V3V3-F 5G4.0 | – |
| VKD1032U4F | 4003644018796 | 10 m AT-N07V3V3-F 5G4.0 | With phase reversal plug |
| VKD2532U4 | 4003644004997 | 25 m AT-N07V3V3-F 5G4.0 | – |
| VKD2532U4F | 4003644018802 | 25 m AT-N07V3V3-F 5G4.0 | With phase reversal plug |
| VKD5032U4 | 4003644005000 | 50 m AT-N07V3V3-F 5G4.0 | – |
| VKD5032U4F | 4003644018819 | 50 m AT-N07V3V3-F 5G4.0 | With phase reversal plug |
| VKD1032U6 | 4003644018826 | 10 m AT-N07V3V3-F 5G6.0 | – |
| VKD1032U6F | 4003644018833 | 10 m AT-N07V3V3-F 5G6.0 | With phase reversal plug |
| VKD2532U6 | 4003644018840 | 25 m AT-N07V3V3-F 5G6.0 | – |
| VKD2532U6F | 4003644018857 | 25 m AT-N07V3V3-F 5G6.0 | With phase reversal plug |
| VKD5032U6 | 4003644018864 | 50 m AT-N07V3V3-F 5G6.0 | – |
| VKD5032U6F | 4003644018871 | 50 m AT-N07V3V3-F 5G6.0 | With phase reversal plug |





Three-phase AC extension cable

HEDI armoured cable PLUS (H07BQ-F), orange, 5x32 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|------------|---------------|-----------------------------|--|---|
| VKD1032Q | 4003644016150 | 10 m H07BQ-F 5G2.5 | | Max. capacity 20 A |
| VKD1032QF | 4003644018888 | 10 m H07BQ-F 5G2.5 | | With phase reversal plug max. capacity 20 A |
| VKD2532Q | 4003644016167 | 25 m H07BQ-F 5G2.5 | | Max. capacity 20 A |
| VKD2532QF | 4003644018895 | 25 m H07BQ-F 5G2.5 | | With phase reversal plug max. capacity 20 A |
| VKD5032Q | 4003644018901 | 50 m H07BQ-F 5G2.5 | | Max. capacity 20 A |
| VKD5032QF | 4003644018918 | 50 m H07BQ-F 5G2.5 | | With phase reversal plug max. capacity 20 A |
| VKD1032Q4 | 4003644018925 | 10 m H07BQ-F 5G4.0 | | – |
| VKD1032Q4F | 4003644018932 | 10 m H07BQ-F 5G4.0 | | With phase reversal plug |
| VKD2532Q4 | 4003644018949 | 25 m H07BQ-F 5G4.0 | | – |
| VKD2532Q4F | 4003644018956 | 25 m H07BQ-F 5G4.0 | | With phase reversal plug |
| VKD5032Q4 | 4003644018963 | 50 m H07BQ-F 5G4.0 | | – |
| VKD5032Q4F | 4003644018970 | 50 m H07BQ-F 5G4.0 | | With phase reversal plug |
| VKD1032Q6 | 4003644018987 | 10 m H07BQ-F 5G4.0 | | – |
| VKD1032Q6F | 4003644018994 | 10 m H07BQ-F 5G4.0 | | With phase reversal plug |
| VKD2532Q6 | 4003644019007 | 25 m H07BQ-F 5G4.0 | | – |
| VKD2532Q6F | 4003644019014 | 25 m H07BQ-F 5G4.0 | | With phase reversal plug |
| VKD5032Q6 | 4003644019021 | 50 m H07BQ-F 5G4.0 | | – |
| VKD5032Q6F | 4003644019038 | 50 m H07BQ-F 5G4.0 | | With phase reversal plug |





In typical HEDI quality:

Extension cables in three-phase AC version, 63 A / compressed-air hose extensions.

Three-phase AC extension cable

Neoprene rubber cable H07RN-F, black, 5x63 A, for permanent outdoor use



| Art. no. | EAN | Cable length and cable type | | Remark |
|-----------|---------------|-----------------------------|--|--------|
| VKD106316 | 4003644011810 | 10 m H07RN-F 5G16.0 | | – |
| VKD256316 | 4003644011827 | 25 m H07RN-F 5G16.0 | | – |



Compressed-air hose extensions

Complete compressed-air hose extension with quick-release coupling and bush socket, fabric-reinforced PVC hose, up to 12 bars



| Art. no. | EAN | Hose length and diameter | | Remark |
|----------|---------------|--------------------------|--|--------|
| LSV9-10 | 4003644004720 | 10 m 9/2.5 mm | | – |
| LSV9-20 | 4003644004737 | 20 m 9/2.5 mm | | – |



The 2- and 3-wire machine connecting cables in various cable qualities and cross-sections are prepared for a swift replacement of defective machine connecting cables. The plug is installed / integrally extruded, the other end of the cable stripped and provided with wire end ferrules.



For a swift replacement:

Machine connecting cables.

Machine connecting cables

In neoprene rubber version (H05RN-F / H07RN-F), black



| Art. no. | EAN | Cable length and cable type | Plug |
|-----------|---------------|-----------------------------|-----------------------------|
| MAL3N210 | 4003644014194 | 3 m H05RN-F 2x1.0 | Integral contour plug |
| MAL5N210 | 4003644014200 | 5 m H05RN-F 2x1.0 | Integral contour plug |
| MAL5N215 | 4003644014217 | 5 m H07RN-F 2x1.5 | Integral contour plug |
| MAL5N315 | 4003644014224 | 5 m H07RN-F 3G1.5 | Installed solid-rubber plug |
| MAL10N315 | 4003644007684 | 10 m H07RN-F 3G1.5 | Installed solid-rubber plug |



Machine connecting cables

In the HEDI armoured cable version (K35 / AT-N07 V3V3-F), yellow



| Art. no. | EAN | Cable length and cable type | Plug |
|----------|---------------|-----------------------------|-----------------------------|
| MAL5315 | 4003644019045 | 5 m AT-N07V3V3-F 3G1.5 | Installed solid-rubber plug |
| MAL10315 | 4003644002702 | 10 m AT-N07V3V3-F 3G1.5 | Installed solid-rubber plug |



Machine connecting cables

In the HEDI armoured cable PLUS version (H07BQ-F), orange



| Art. no. | EAN | Cable length and cable type | Plug |
|-----------|---------------|-----------------------------|-----------------------------|
| MAL5Q210 | 4003644019410 | 5 m H07BQ-F 2x1.0 | Integral contour plug |
| MAL5Q215 | 4003644016334 | 5 m H07BQ-F 2x1.5 | Integral contour plug |
| MAL5Q315 | 4003644019052 | 5 m H07BQ-F 3G1.5 | Installed solid-rubber plug |
| MAL10Q315 | 4003644002696 | 10 m H07BQ-F 3G1.5 | Installed solid-rubber plug |





Our best-selling cables are available by the metre for customized assembly. You can select any length you want. Cutting is at no costs.

For customized assembly:

HEDI cut-to-order lengths.

Cut-to-order lengths of PVC cable

H05VV-F



| Art. no. | EAN | Cable length and cable type | | Colour |
|----------|---------------|-----------------------------|--|--------|
| KK310 | 4003644019069 | H05VV-F 3G1.0 | | Black |
| KK315 | 4003644007950 | H05VV-F 3G1.5 | | Black |
| KK31501 | 4003644001392 | H05VV-F 3G1.5 | | Red |
| KK31502 | 4003644013159 | H05VV-F 3G1.5 | | Yellow |

Cut-to-order lengths of rubber cable

H05RR-F



| Art. no. | EAN | Cable length and cable type | | Colour |
|----------|---------------|-----------------------------|--|--------|
| GK315 | 4003644006908 | H05RR-F 3G1.5 | | Black |
| GK325 | 4003644006915 | H05RR-F 3G2.5 | | Black |

Cut-to-order lengths of neoprene-rubber cable

H07RN-F



| Art. no. | EAN | Cable length and cable type | | Colour |
|----------|---------------|-----------------------------|--|--------|
| NK315 | 4003644006809 | H07RN-F 3G1.5 | | Black |
| NK31501 | 4003644019106 | H07RN-F 3G1.5 | | Red |
| NK325 | 4003644006816 | H07RN-F 3G2.5 | | Black |
| NK32501 | 4003644001385 | H07RN-F 3G2.5 | | Red |
| NK515 | 4003644006823 | H07RN-F 5G1.5 | | Black |
| NK525 | 4003644006830 | H07RN-F 5G2.5 | | Black |
| NK540 | 4003644006847 | H07RN-F 5G4.0 | | Black |
| NK560 | 4003644006854 | H07RN-F 5G6.0 | | Black |
| NK5100 | 4003644006861 | H07RN-F 5G10.0 | | Black |



Cut-to-order HEDI armoured cable AT-N07V3V3-F

K35/AT-N07V3V3-F



| Art. no. | EAN | Cable length and cable type | | Colour |
|----------|---------------|-----------------------------|--|--------|
| PK315 | 4003644000739 | AT-N07V3V3-F 3G1.5 | | Yellow |
| PK325 | 4003644000746 | AT-N07V3V3-F 3G2.5 | | Yellow |
| PK515 | 4003644014842 | AT-N07V3V3-F 5G1.5 | | Yellow |
| PK525 | 4003644014859 | AT-N07V3V3-F 5G2.5 | | Yellow |



Cut-to-order HEDI armoured cable PLUS

H07BQ-F



| Art. no. | EAN | Cable length and cable type | | Colour |
|----------|---------------|-----------------------------|--|--------|
| PU315 | 4003644013173 | H07BQ-F 3G1.5 | | Orange |
| PU325 | 4003644013753 | H07BQ-F 3G2.5 | | Orange |
| PU515 | 4003644013890 | H07BQ-F 5G1.5 | | Orange |
| PU525 | 4003644013319 | H07BQ-F 5G2.5 | | Orange |



Wooden disposable reel

Transport aid for cut-to-order cables

To ensure safe transport and to facilitate further handling, all cables with a length of more than 200 metres (with larger diameters of 3G2.5 mm² and more already at lengths exceeding 100 metres) come on a wooden disposable reel (fixed price € 13.00).



Exactly the right thing for each application:

HEDI distributors

The extensive product range in the distributor section presents itself in the usual high HEDI quality.

The elaborated design concept of the suspended distributors for industry and workshop use offers a multitude of possibilities for socket locations and variants in a compact size.

Like all the other distributors, the m.STATION distributors are impact-resistant, rugged and virtually indestructible. They are made to be used at construction sites, in the trades and in industry. The versions of e.STATION and m.STATION with additional light module are new. You can find them in the section "Lamps" from page 110 onwards.

The well-proven HEDI plastic distributors for mobile applications and wall installation fascinate with a large number of configuration options and customized extensions.

Like the HEDI multiple sockets, the adapter plugs and adapter cables offer best compactness and lowest weight. With their variety of versions they are perfectly suited for private areas, office, industry and craftspersons.

The range includes:

| | Page |
|---|--------|
| ■ Suspended energy Distributors HEDI e.STATION | 96-97 |
| ■ Socket distributor HEDI m.STATION | 98-100 |
| ■ Socket distributor made from solid rubber | 102 |
| ■ Multiple sockets made from solid rubber | 103 |
| ■ Miniature socket distributors and adapter plugs | 104 |
| ■ Multiple sockets | 105 |



Made
in
Germany



HEDI e.STATION sets standards in the product world of suspended energy distributors. Despite its compact size, its design provides a large number of socket locations and variants. Installing fuses and residual current device (RCD) is also possible with HEDI e.STATION. It is thus the optimum stationary suspended energy station for industry and workshop.

For use in industry and workshop:

HEDI e.STATION.



- Dimensions:
W x H x D: 227 x 305 x 212 mm
- With 2 m galvanized knotted-link chain and carabine hook for suspension

Made
in
Germany



Suspended energy distributor HEDI e.STATION

Electrical versions

| Art. no. | EAN | Outputs | Residual current operated circuit breaker (RCCB) | Maximum capacity | Installed fuses | |
|------------|---------------|-------------|--|------------------|---------------------------|--|
| KVE6000 | 4003644014606 | 6x | — | 3.5 kW | — | |
| KVE602016 | 4003644014637 | 6x 2x | — | 9.5 kW | — | |
| KVE302016I | 4003644014668 | 3x 2x | 40 / 0.03 A | 9.5 kW | — | |
| KVE301132 | 4003644014675 | 3x 1x 1x | — | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |



- Dimensions:
W x H x D: 227 x 305 x 212 mm
- With 2 m galvanized knotted-link chain and carabine hook for suspension and 2 m compressed-air hose 9 x 2.5 mm

Made
in
Germany



Suspended energy distributor HEDI e.STATION

Combination versions energy / compressed air (up to 12 bars)

| Art. no. | EAN | Outputs | Residual current operated circuit breaker (RCCB) | Maximum capacity | Installed fuses | |
|------------|---------------|----------------|--|------------------|---------------------------|--|
| KVE6000L | 4003644014682 | 6x 2x | — | 3.5 kW | — | |
| KVE601016L | 4003644014644 | 6x 2x 1x | — | 9.5 kW | — | |
| KVE301132L | 4003644016129 | 3x 2x 1x 1x | — | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |



- Dimensions:
W x H x D: 227 x 305 x 212 mm
- With 2 m galvanized knot-
ted-link chain and carbine hook
for suspension

Made
in
Germany



Suspended energy distributor HEDI e.STATION

Combined energy / EDP versions

| Art. no. | EAN | Outputs | Residual current operated circuit breaker (RCCB) | Maximum capacity | Installed fuses | |
|-------------|---------------|-------------------------|--|---------------------|--------------------|--|
| KVE3000DV | 4003644019120 | 3x CAT6 BTR 2x | – | 3.5 kW | – | |
| KVE302016DV | 4003644019137 | 3x 2x CAT6 BTR 2x | – | 9.5 kW | – | |
| KVE2DV | 4003644006045 | CAT6 BTR 4x | – | – | – | |

Note: – The new distributor lamps LED.STATION (see Figure) can be found on the pages 110 ...111





The new HEDI m.STATION is trend-setting for the mobile socket distributors. Impact-resistant, rugged and robust and virtually indestructible, HEDI m.STATION is made for utilization at construction sites, in trade and in industry. Its great strength is in the multitude of available socket locations and variations, despite its relatively small size.

For mobile use at construction sites, in the trades and in industry:

HEDI m.STATION.


Mobile socket distributor HEDI m.STATION

Standard versions, 16 A



■ Dimensions: W x H x D:
227 x 305 x 212 mm

Made
in
Germany



| Art. no. | EAN | Connecting plug and connecting cable | Outputs | Maximum capacity | Installed fuses | |
|-----------|---------------|--|----------|------------------|-----------------|--|
| KVM8000 | 4003644016716 | Schuko, approx. 2.5 m H07RN-F 3G2.5 | 8x | 3.5 kW | — | |
| KVM302016 | 4003644014651 | CEE 5x16 A, approx. 2.5 m, H07RN-F 5G2.5 | 3x 2x | 9.5 kW | — | |
| KVM402016 | 4003644016006 | CEE 5x16 A, approx. 2.5 m, H07RN-F 5G2.5 | 4x 2x | 9.5 kW | — | |
| KVM600016 | 4003644015818 | CEE 5x16 A, approx. 2.5 m, H07RN-F 5G2.5 | 6x | 9.5 kW | — | |

Personal
SAFETY
SWITCH

Mobile socket distributor HEDI m.STATION

Versions with residual current device (RCD), 16 A



■ Dimensions: W x H x D:
227 x 305 x 212 mm

Made
in
Germany



| Art. no. | EAN | Connecting plug and connecting cable | Outputs | Maximum capacity | Residual current protective devices (RCCB) | Installed fuses | |
|------------|---------------|---|----------|------------------|--|-----------------|--|
| KVM8000I | 4003644014699 | Schuko, approx. 2.5 m H07RN-F 3G2.5 | 8x | 3.5 kW | 25 / 0.03 A | — | |
| KVM402016I | 4003644014705 | CEE 5x16 A, approx. 2.5 m H07RN-F 5G2.5 | 4x 2x | 9.5 kW | 40 / 0.03 A | — | |
| KVM600016I | 4003644019144 | CEE 5x16 A, approx. 2.5 m H07RN-F 5G2.5 | 6x | 9.5 kW | 40 / 0.03 A | — | |

Personal
SAFETY
SWITCH



Mobile socket distributor HEDI m.STATION

AC version with personal protective device PRCD-S, 0.03 A

| Art. no. | EAN | Connecting plug and connecting cable | Outputs | Maximum capacity | Installed fuses | |
|---------------|---------------|--------------------------------------|---------|------------------|------------------|--|
| KVM4000PRCD-S | 4003644000319 | Schuko, approx. 2.5 m H07RN-F 3G2.5 | 4x | 3.5 kW | PRCD-S 16/0.03 A | |

■ Dimensions:
W x H x D: 227 x 305 x 212 mm

Made
in
Germany




Mobile socket distributor HEDI m.STATION

Version with calibrated electricity meter, 16 A

| Art. no. | EAN | Connecting plug and connecting cable | Outputs | Maximum capacity | Installed fuses | |
|------------|---------------|---|----------|------------------|-----------------|--|
| KVM8000Z | 4003644015887 | Schuko, approx. 2.5 m H07RN-F 3G2.5 | 8x | 3.5 kW | — | |
| KVM402016Z | 4003644015894 | CEE 5x16 A, approx. 2.5 m H07RN-F 5G2.5 | 4x 2x | 9.5 kW | — | |
| KVM600016Z | 4003644019151 | CEE 5x16 A, approx. 2.5 m H07RN-F 5G2.5 | 6x | 9.5 kW | — | |

■ Dimensions:
W x H x D: 227 x 305 x 212 mm

Made
in
Germany





For mobile use at construction sites, in the trades and in industry:

HEDI m.STATION.



■ Dimensions:
W x H x D: 227 x 305 x 212 mm

Made in Germany



Mobile socket distributor HEDI m.STATION


Versions with electricity meter and protective circuit-breaker (RCD), 16 A

| Art. no. | EAN | Connecting plug and cable | Outputs | Residual current protective devices (RCCB) | Maximum capacity | Installed fuses | |
|-----------|---------------|-------------------------------------|---------|--|------------------|-----------------|--|
| KVM8000IZ | 4003644015856 | Schuko, approx. 2.5 m H07RN-F 3G2.5 | 8x | 25 / 0.03 A | 3.5 kW | — | |



■ Dimensions:
W x H x D: 227 x 305 x 212 mm

Made in Germany



Mobile socket distributor HEDI m.STATION

Standard versions, 32 A

| Art. no. | EAN | Connecting plug and connecting cable | Outputs | Maximum capacity | Installed fuses | |
|------------|---------------|---|----------|------------------|--------------------------|--|
| KVM4011324 | 4003644001415 | CEE 5x32 A, approx. 2.5 m H07RN-F 5G4.0 | 4x 1x 1x | 19.5 kW | 1xB 16 A 1x 3x B 16 A | |
| KVM4002324 | 4003644002641 | CEE 5x32 A, approx. 2.5 m H07RN-F 5G4.0 | 4x 2x | 19.5 kW | 2xB 16 A | |
| KVM4020324 | 4003644002672 | CEE 5x32 A, approx. 2.5 m H07RN-F 5G4.0 | 4x 2x | 19.5 kW | 1xB 16 A 1x 3x B 16 A | |





The strong black socket distributor, made from fully insulated and impact-resistant solid rubber, is distinguished by good compactness, low weight and easy accessibility from all four sides. The fuses are installed behind a splashproof cover on the top. A rugged carrying handle sits on the housing cover.

For use at construction sites, in the trades and in industry:

















HEDI three-phase socket distributor made from solid rubber.



- Versions at same price on request also available with automatic type-C circuit-breakers
- Further configuration options on request

HEDI socket distributor made from solid rubber







Housing size (W x H x D): 310 x 230 x 290 mm

| Art. no. | EAN | Connecting plug and cable | Out-puts | Residual current protective devices (RCCB) | Maximum capacity | Installed fuses | |
|-----------|---------------|--|--|--|------------------|---------------------------|--|
| KVG516 | 4003644005345 | CEE 5x16 A |  3x  2x | — | 9.5 kW | — | |
| KVG516I | 4003644019182 | CEE 5x16 A |  3x  2x | 40 / 0.03 A | 9.5 kW | — | |
| KVG532 | 4003644005352 | CEE 5x32 A |  3x  1x  1x | — | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |
| KVG532I | 4003644019199 | CEE 5x32 A |  3x  1x  1x | 40 / 0.03 A | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |
| KVG632N4 | 4003644019205 | CEE 5x32 A approx. 2.5 m H07RN-F 5G4.0 |  3x  2x  1x | — | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |
| KVG632N4I | 4003644019212 | CEE 5x32 A approx. 2.5 m H07RN-F 5G4.0 |  3x  2x  1x | 40 / 0.03 A | 19.5 kW | 1x B 16 A 1x 3x B 16 A | |



- Versions at same price on request also available with automatic type-C circuit-breakers
- Further configuration options on request

Housing size (W x H x D): 380 x 265 x 380 mm

| Art. no. | EAN | Connecting plug and cable | Outputs | Residual current protective devices (RCCB) | Maximum capacity | Installed fuses | |
|----------|---------------|---|--|--|------------------|---|--|
| KVG863I | 4003644019229 | CEE 5x63 A |  3x  2x  2x | 63 / 0.03 A | 39 kW | 1x B 16 A 1x 3x B 16 A 1x 3x B 32 A | |
| KVG963I | 4003644019236 | CEE 5x63 A approx. 2.5 m H07RN-F 5G10,0 |  4x  3x  2x | 63 / 0.03 A | 39 kW | 1x B 16 A 1x 3x B 16 A 1x 3x B 32 A | |

Made in Germany



The socket distributor, made from fully insulated and impact-resistant solid rubber, presents itself as a robust component. The particularly good compactness, the light weight and the rugged carrying handle at the top end of the assembly makes it suitable for carrying and suspending. The housing is black.

For use at construction sites, in the trades and in industry:

HEDI multiple sockets made from solid rubber.



KVG6000



KVG202016I



KVG4000PRCD-S

Made in Germany

HEDI multiple sockets made from solid rubber

Housing size (W x H x D): 430 x 72 x 115 mm

| Art. no. | EAN | Connecting plug and cable | Outputs | Residual current protective devices (RCCB) | Maximum capacity | |
|----------------|---------------|--------------------------------|---------|--|------------------|--|
| KVG6000 | 4003644002221 | Schuko 2.5 m H07RN-F 3G1.5 | 6x | — | 3.5 kW | |
| KVG5000I | 4003644002238 | Schuko 2.5 m H07RN-F 3G1.5 | 5x | 25 / 0.03 A | 3.5 kW | |
| KVG4000 PRCD-S | 4003644013128 | Schuko 2.0 m H07RN-F 3G2.5 | 4x | 25 / 0.03 A PE monitoring (PRCD-S) | 3.5 kW | |
| KVG302016 | 4003644002245 | CEE 5x16 A 2.5 m H07RN-F 5G2.5 | 3x 2x | — | 9.5 kW | |
| KVG202016I | 4003644002252 | CEE 5x16 A 2.5 m H07RN-F 5G2.5 | 2x 2x | 25 / 0.03 A only for Schuko sockets | 9.5 kW | |





The practical small socket distributor and adapter plug offer excellent compactness and minimum weight. It consist of fully insulated, impact-resistant black plastic material.



For use at construction sites, in the trades and in industry:


Miniature socket distributors and adapter plugs.

Three-phase AC adapter plug

Dimensions (W x H x D): 115 x 80 x 78 mm






| Art. no. | EAN | Input plug | Output plug | Installed fuses | |
|----------|---------------|------------------------------|--|-----------------|--|
| AK1632F | 4003644002122 | CEE 5x16 A Phase reverser |  1x | — | |
| AK3216F | 4003644002153 | CEE 5x32 A Phase reverser |  1x | 3x C 16 A | |



Three-phase AC distributor

Dimensions (W x H x D): 115 x 115 x 80 mm




| Art. no. | EAN | Input plug / connecting cable | Output plug | Capacity | |
|----------|---------------|-----------------------------------|--|----------|--|
| 97002 | 4003644019243 | CEE 5x16 A |  3x | 9.5 kW | |
| 97003 | 4003644014019 | CEE 5x16 A 2.5 m H07RN-F 5G2.5 |  2x  1x | 9.5 kW | |




Adapter cable three-phase AC Schuko

With approx. 2.5 m connecting cable and rugged triple solid-rubber coupling. Each of the three phases is routed to a different Schuko socket.



| Art. no. | EAN | Input plug / connecting cable | Output plug | Capacity | |
|----------|---------------|-----------------------------------|--|----------|--|
| AK16HK | 4003644013562 | CEE 5x16 A 2.5 m H07RN-F 5G2.5 |  3x | 9.5 kW | |



Multiple sockets in various versions can perfectly be used in private areas and offices, in industry and in trades.

For use at construction sites, in the trades and in industry:

HEDI multiple sockets.

HEDI multiple socket



| Art. no. | EAN | Description | |
|----------|---------------|--|--|
| SL315 | 4003644004379 | 3x, black approx. 1.4 m connecting cable H05VV-F 3G1.5 Protection rating IP40, housing size (W x H x D): 150x50x45 mm | |
| SLS614S | 4003644012770 | 6x, black with ON/OFF switch approx. 1.4 m connecting cable H05VV-F 3G1.5 Protection rating IP40, housing size (W x H x D): 310x40x50 mm | |
| SLS614SÜ | 4003644012978 | 6x, black with ON/OFF switch and overvoltage protection approx. 1.4 m connecting cable H05VV-F 3G1.5 Protection rating IP40, housing size (W x H x D): 360x40x50 mm | |
| SLS630SF | 4003644012985 | 6x, black with splash-protecting covers and ON/OFF switch, approx. 3 m connecting cable H07RN-F 3G1.5, protection rating IP44 Approved for permanent outdoor use, housing size (W x H x D): 420x40x60 mm | |





Radiating for perfect working conditions:

HEDI lamps

HEDI lamps excite with leading technology, proven high quality and optimum function.

HEDI machine and workbench lamps were developed specifically for industrial use. Here, they excel with perfect illumination of workplaces and all sorts of different processing machinery.

HEDI working lamps are used by craftspersons at the construction site to illuminate their working area with a uniformly bright light with little shadow. Painters and tile-layers, in particular, appreciate these benefits during their daily work. The LED.STATION is the latest HEDI development - a clever combination of socket distributor and lamp.

The excellent luminous power of the HEDI spotlights excites when large surfaces in rooms, halls or open spaces are to be illuminated.

The HEDI lamp program: The professional solution for each application.

The range includes:

| | Page |
|-------------------------------|---------|
| ■ Working lamps | 108-113 |
| – LEDCUBE | 108 |
| – LED.STATION | 110-111 |
| – HEDI Light | 112 |
| ■ Halogen spotlights | 114-116 |
| ■ LED spotlights | 117 |
| ■ Hand lamps | 118-119 |
| ■ Machine and workbench lamps | 120-125 |

Made 
in 
Germany 





The LEDCUBE is the optimum working lamp for everybody who needs uniform and flat light with little shadow for their work. Besides the luminous characteristics, such as an excellent luminous efficiency of approximately 110 lumens per watt, the LEDCUBE offers you a functional and rugged housing. The LEDCUBE convinces with its innovative design and with top quality "made in Germany" – from the housing to the LEDs.

For use at construction sites, in industry, workshop, and privately:


HEDI LEDCUBE working lamps.




- Dimensions:
W x H x D:
273 x 256 x 163 mm
- Handle integrated in the housing
- Tripod attachment possible
with adapter plate (accessory)
- Suspension possible with
enclosed CableFix
- Large radiation angle of 180°
- Luminous colour: 6,500 Kelvin
interference-suppressed to DIN EN 62493
- AL35LEDN: With emergency light function
(min. 2 hours shining)
- Internationally registered design

LEDCUBE working lamp

| Art. no. | EAN | Output | Remark | Connecting cable | |
|----------|---------------|---|---|------------------------------|--|
| AL35LED | 4003644005604 | 35 watts 3,800 lumens TÜV/GS tested | with splash-protected Schuko socket at the rear Protection class I | approx. 3 m H07RN-F 3G1.5 | |
| AL35LEDN | 4003644005635 | 35 watts 3,800 lumens with emergency light func- tion, TÜV/GS tested | with splash-protected Schuko socket at the rear Protection class I | Approx. 3 m H07RN-F 3G1.5 | |



Made in Germany



Each of the four side faces of the HEDI LEDCUBE features a different angle of inclination. This permits the HEDI LEDCUBE to be positioned in five radiation positions with angles of inclination of 0 – 90 degrees.



Tripod adapter LEDCUBE

Made in Germany

| Art. no. | EAN | Version | |
|----------|---------------|--|--|
| 9076 | 4003644005628 | Tripod adapter for HEDI LEDCUBE for the installation on most current tripods | |





Whether you line your attic, work in shells, in cellar rooms, or at an assembly position in a workshop or in industry, the new HEDI distribution stations with light function ensure perfect working conditions at optimum light conditions with 1,950 lumens at 25 watts energy consumption per light module and a radiation angle of 270° at a luminous colour of 6,500 Kelvin.

For use at construction sites, in industry and workshop:


HEDI LED.STATION working lamps.



HEDI LED e.STATION

for suspension in industry and workshop

- With 2 m galvanized knotted-link chain and carbine hook for stationary suspension
- Dimensions:
W x H x D: 295 x 230 x 235 mm
(AKL2E000)
295 x 225 x 215 mm
(other versions)



Made in Germany




- Dimensions:
W x H x D: 295 x 225 x 215 mm

HEDI LED m.STATION

for mobile use

| Art. no. | EAN | Connecting plug and cable | Outputs | Maximum capacity | Number of light modules | |
|------------|---------------|--|----------|------------------|-------------------------|--|
| AKLM4000 | 4003644000180 | Schuko, 250 V 2.5 m H07RN-F 3G2.5 | 4x | 3.5 kW | 1 | |
| AKLM402016 | 4003644000234 | CEE 5x16 A, 400 V 2.5 m H07RN-F 5G2.5 | 4x 2x | 9.5 kW | 1 | |




Made in Germany



HEDI LED e.STATION

for temporary suspension at construction site and assembly positions

| Art. no. | EAN | Connecting plug and cable | Outputs | Maximum capacity | Number of light modules | |
|---------------|----------------|--|----------|------------------|-------------------------|--|
| AKL2E4000N2 | 40034644011681 | Schuko, 250 V 2.5 m H07RN-F 3G2.5 | 4x | 3.5 kW | 2 | |
| AKL2E201016N2 | 4003644011698 | CEE 5x16 A, 400 V 2.5 m H07RN-F 5G2.5 | 2x 1x | 9.5 kW | 2 | |



- With 2 m galvanized knotted-link chain and carabine hook for stationary suspension and installed connecting cable
- Dimensions:
W x H x D: 295 x 230 x 235 mm

Made
in
Germany



The impact-resistant working lamps for specific workplace illumination provide strong light power for up to 8,000 operating hours. At minimum heat dissipation, the special tubes radiate a soft light with little shadow. The foot with different latching positions permits the working lamps to be put to the correct position. Alternatively, they can be attached to the wall, ceiling or installed on a tripod.

For use at construction sites, in industry and workshop:


HEDI-Light working lamps.



- Dimensions:
W x H x D: 370 x 420 x 125 mm
- Luminous colour: 4000 K

HEDI-Light working lamp

| Art. no. | EAN | Output | Connecting cable | Tubes | Integrated 4-fold socket and light switch | | Remark |
|----------|---------------|-------------------------|---------------------------|-----------------------------------|---|--|---------------------|
| AL32 | 4003644005253 | 32 watts / 1,700 lumens | approx. 5 m H05RN-F 2x1.0 | 1 annular tube 32 watts | — | | Protection class II |
| AL32G | 4003644000371 | 32 watts / 1,700 lumens | approx. 5 m H07RN-F 3G1.5 | 1 annular tube 32 watts | Available | | — |
| AL56 | 4003644005017 | 56 watts / 3,400 lumens | approx. 5 m H05RN-F 2x1.0 | 2 tubes 1 x 32 watts 1 x 24 watts | with light switch | | Protection class II |
| AL56S | 4003644000593 | 56 watts / 3,400 lumens | approx. 5 m H07RN-F 3G1.5 | 2 tubes 1 x 32 watts 1 x 24 watts | Available | | — |



Made in Germany

Tripod for working lamps and spotlights

| Art. no. | EAN | Version | | Remark |
|----------|---------------|---|--|--------|
| 9035 | 4003644006663 | 4 folding feed ensure a secure foothold. Maximum height: 2.60m. | | — |
| 9076 | 4003644005628 | Tripod adapter for HEDI LEDCUBE for the installation on most current tripods | | — |
| 9078 | 4003644001774 | Tripod with 3 foldable feet. Maximum height 1.90 m. Not suitable for large lamps and spotlights. (see page 114) | | — |

Spare illuminants

| Art. no. | EAN | Version / output | Spare illuminants for art. no. | | Remark |
|----------|---------------|---------------------------------------|--------------------------------|--|--------|
| 9045 | 4003644015399 | Tube, 24 watts * ¹ | AL72S | | — |
| 9049 | 4003644015436 | Annular tube, 32 watts * ² | AL32(G), AL56(S) | | — |
| 9050 | 4003644015450 | Tube, 24 watts * ² | AL56(S) | | — |

*¹ Luminous colour 6,400 K, energy efficiency class A,

*² Luminous colour 4,000 K, energy efficiency class B,

9035



The halogen spotlight is used for a bright illumination of large rooms and open spaces. It is available in different versions, on tripod, in carrying rack or for wall installation.

For use at construction sites, in industry, workshop, and privately:

Halogen spotlights.



- Dimensions HS500L:
W x H x D: 290 x 400 x 200 mm
- Dimensions HS1000L:
W x H x D: 430 x 500 x 330 mm
- Rack made from blue powder-coated steel tube
- With carrying handle made from rugged plastic material
- The spotlight can be swivelled up and down in the rack
- Spotlight with protective grille
- Delivery including illuminant





- Tripod made from blue powder-coated steel tube
- Continuous height adjustment from 0.8 to 1.9 m (including spotlight)
- Spotlight with protective grille
- Delivery including illuminant

Halogen spotlight "Comfort"

For mobile use


| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|-----------------------------|-----------------------------|--|
| HS500L | 4003644005093 | 400 watts / 9,200 lumens | approx. 1.8 m H05RN-F 3G1.0 | |
| HS1000L | 4003644012992 | 1,000 watts / 22,000 lumens | approx. 1.8 m H05RN-F 3G1.0 | |



Halogen spotlight "Comfort"

With telescopic tripod

| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|--------------------------|-----------------------------|--|
| HSS500L | 4003644005109 | 400 watts / 9,200 lumens | approx. 3.0 m H05RN-F 3G1.0 | |



Spotlight tripod "Comfort"

Can be used for our spotlights H500L, H30LED and H50LED

| Art. no. | EAN | Delivery | Connecting cable with plug | |
|----------|---------------|-------------------|----------------------------|--|
| 9078 | 4003644001774 | without spotlight | — | |




- Dimensions: W x H x D:
220 x 310 x 200 mm
- Rack made from yellow powder-coated steel tube
- With padded carrying handle
- Spotlight with protective grille
- Delivery including illuminant

Halogen spotlight "Standard"

For mobile use

| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|--------------------------|-----------------------------|--|
| HSG500L | 4003644011483 | 400 watts / 9,200 lumens | approx. 1.8 m H05RN-F 3G1.0 | |





- Dimensions H500L:
W x H x D: 185 x 180 x 150 mm
- Dimensions H1000L:
W x H x D: 270 x 230 x 173 mm
- Dimensions H1500L:
W x H x D: 343 x 250 x 242 mm
- With installation bracket for wall or ceiling installation
- Spotlight with protective grille
- Delivery including illuminant

Halogen spotlight

For wall installation

| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|-----------------------------|-----------------------------|--|
| H500L | 4003644005086 | 400 watts / 9,200 lumens | approx. 1.5 m H05RN-F 3G1.0 | |
| H1000L | 4003644005116 | 1,000 watts / 22,000 lumens | approx. 1.5 m H05RN-F 3G1.0 | |
| H1500L | 4003644019267 | 1,500 watts / 33,000 lumens | approx. 1.5 m H05RN-F 3G1.0 | |



For use at construction sites, in industry, workshop, and privately:

Halogen spotlights.



Spare illuminants

| Art. no. | EAN | Version / output | Spare illuminants for art. no. | |
|----------|---------------|------------------|---------------------------------|--|
| 9062 | 4003644015733 | Halogen, 230 W | H500L, HSG500L, HS500L, HSS500L | |
| 9047 | 4003644015412 | Halogen, 400 W | H500L, HSG500L, HS500L, HSS500L | |
| 9048 | 4003644015429 | Halogen, 1,000 W | H1000L, HS1000L | |
| 9070 | 4003644019274 | Halogen, 1,500 W | H1500L | |





To illuminate small and medium-sized rooms and open spaces, the LED spotlights are an energy-saving alternative of halogen spotlights. They are available in a carrying rack or for wall installation.

For use at construction sites, in industry, workshop, and privately:

LED spotlights.




- Dimensions HS30LED W x H x D:
300 x 360 x 240 mm
Dimensions HS50LED W x H x D:
360 x 350 x 300 mm
- Light range HS30LED: approx. 15 m
Light range HS50LED: approx. 20 m
- Rack made from blue powder-coated steel tube
- With carrying handle made from rugged plastic material
- The spotlight can be swivelled up and down
- Colour temperature of the light:
6,500 Kelvin
- Radiation angle: 130°

LED spotlights "Comfort"

For mobile use

| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|-------------------------|----------------------------|--|
| HS30LED | 4003644006359 | 30 watts / 2,500 lumens | approx. 5 m H07RN-F 3G1.0 | |
| HS50LED | 4003644006335 | 50 watts / 4,000 lumens | approx. 5 m H07RN-F 3G1.0 | |




- Dimensions H30LED W x H x D:
220 x 200 x 140 mm
Dimensions H50LED W x H x D:
280 x 240 x 160 mm
- Light range H30LED: approx. 15 m
Light range H50LED: approx. 20 m
- With installation bracket for wall or ceiling installation
- The spotlight can be swivelled up and down
- Colour temperature of the light:
6,500 Kelvin
- Radiation angle: 130°

LED spotlights "Comfort"

For wall installation

| Art. no. | EAN | Output | Connecting cable with plug | |
|----------|---------------|-------------------------|----------------------------|--|
| H30LED | 4003644006366 | 30 watts / 2,500 lumens | approx. 5 m H07RN-F 3G1.0 | |
| H50LED | 4003644006342 | 50 watts / 4,000 lumens | approx. 5 m H07RN-F 3G1.0 | |





The tubular lamps, open-guard lamps and accumulator hand lamps can flexibly be used in industry, workshop and in private areas.

For use at construction sites, in industry, workshop, and privately:

Hand lamps.



- With 28 LEDs
- For bright and specific illumination
- Impact-resistant rubber-coated housing
- With swivelling suspension hook (top) and retaining magnet at the rear
- Dimensions (H x W x D): 250 x 50 x 50 mm
- Illumination time: approx. 5 hours
- With a 250-V power pack and a 12-V car power pack

Accumulator LED hand lamp "Compact"

| Art. no. | EAN | Output | Connecting cable | |
|----------|---------------|--------|------------------|--|
| AL28LED | 4003644013586 | — | — | |



Accessories for accumulator LED hand lamp "Compact"

| Art. no. | EAN | Output | Description | |
|----------|---------------|--------|---|--|
| 9080 | 4003644013593 | — | Spare accumulator for new version from 2/2016 | |
| 9040 | 4003644013609 | — | Spare power pack, 250 V | |
| 9041 | 4003644013654 | — | Car power pack, 12 V | |



- 21 bright white LEDs at the side
- 5 bright white LEDs at the top (torch function)
- Impact-resistant rubber-coated housing
- With 2 swivelling suspension hooks
- 2 retaining magnets at the rear
- 1 retaining magnet at the folding foot
- Dimensions (H x W x D): 255 x 50 x 45 mm
- Illumination time: approx. 4 hours
- With charging plug (250 V + 12 V)

Accumulator LED hand lamp "Comfort"

Hinged and with additional torch function

| Art. no. | EAN | Output | Connecting cable | |
|----------|---------------|--------|------------------|--|
| AL521LED | 4003644012626 | — | — | |



Accessories for accumulator LED hand lamp "Comfort"


| Art. no. | EAN | Output | Description | |
|----------|---------------|--------|-------------------------|--|
| 9074 | 4003644009398 | — | Spare power pack, 250 V | |
| 9075 | 4003644009381 | — | Spare accumulator | |



- With swivelling plastic suspension hook, thus no risk of an electrical shock
- Fully insulated
- With electronic starter

Tubular lamp

| Art. no. | EAN | Output | Connecting cable | |
|----------|---------------|--------|----------------------------|--|
| HL08I | 4003644005161 | 8 watt | approx. 5 m H05RN-F 2x0.75 | |



- With 100 or 160 LEDs
- With swivelling suspension hook
- Hexagonal handle stops the lamp from rolling away
- Illumination time: approx. 3 hours
- With charging plug (250 V + 12 V)

Tubular LED accumulator lamp


| Art. no. | EAN | Output | Connecting cable | |
|----------|---------------|-----------------|------------------|--|
| HL100LED | 4003644010806 | Approx. 5 watts | — | |
| HL160LED | 4003644010615 | Approx. 8 watts | — | |



- Holder E27
- Delivery without illuminants
- Connecting cable: approx. 5 m H05RN-F 2x1.0

Open-guard lamp

| Art. no. | EAN | For illuminants up to | Version | |
|----------|---------------|-----------------------|--------------------------|--|
| HL60G | 4003644005130 | 60 watt | Rubber, with impact ring | |
| HL10G | 4003644005123 | 100 watt | Rubber, with impact ring | |



We present the new generation of HEDI machine and workbench lamps in an appealing design! They are equipped with the latest LED technology in the lamp head. The LEDs, which can not be removed, provide for an optimum illumination of the workpiece in daylight quality. The obvious benefits are the low energy consumption and the fact, that the illuminated object is not heated up. The impact-resistant, splash-protected and dustproof design is ideally suited to be used directly on a machine. The lamps are available for 250 V or 24 V, and with a 500 mm long coated flexible metallic gooseneck. The light switch is integrated into the lamp base. 1 retaining magnet and 1 table clip are contained in the scope of delivery.

For use in industry and workshop:

Machine and workbench lamps in splash-protected version.



HEDI machine lamps LED pro!

Splash-protected and dustproof



■ all variants interference-suppressed to DIN EN 62493

| Art. no. | EAN | Output | Connecting cable | | Remark |
|----------|---------------|--|--------------------------------------|--|--|
| ML1209 | 4003644016686 | 250 V/12 V/9 watts 750 lumens, luminous colour 6,400 K, illuminance 3,350 lux (1 metre) | approx. 3 m H05RN-F 2x1.0 | | Spot, Beam angle 60° protection class II TÜV/GS-tested, illuminant not replaceable |
| ML24V09 | 4003644016709 | 24 V, AC/DC, 9 watts 750 lumens, luminous colour 6,400 K, illuminance 3,350 lux (1 metre) | approx. 2 m LIF9YH-11YH 3x0.34 | | Spot, Beam angle 60° protection class III TÜV/GS-tested, illuminant not replaceable |
| ML1210B | 4003644001590 | 250 V / 12 V, 9.6 watts 650 lumens, luminous colour 6,400 K, illuminance 400 lux (1 metre) | approx. 3 m H05RN-F 2x1.0 | | Wide beam, Beam angle 150° protection class III TÜV/GS-tested, illuminant not replaceable |



Made in Germany





The proven HEDI machine and workbench lamps have been in use for many years. They exist in various variants with illuminants for spot-light or wide beam, or combined with a hinged lens (duo versions) for the currently required illumination. All lamps are equipped with a 500 mm long coated metallic gooseneck.

For use in industry and workshop:


Machine and workbench lamps.



HEDI machine lamps

DUO versions (spot and wide beam)

| Art. no. | EAN | Output | Illuminant | Connecting cable | Beam angle without lens | Beam angle with lens | | Remark |
|-----------|---------------|---|----------------------|---------------------------|-------------------------|----------------------|--|----------------------------------|
| ML1206DUO | 4003644000203 | 250 V / 12 V, 450 lumens, luminous colour 6,400 K, illuminance (1 m) with lens 525 lux / without lens 210 lux | 6 watts LED wide | approx. 3 m H05RN-F 2x1.0 | 50° | 25° | | Protect. cl. II |
| ML1220DUO | 4003644016051 | 250 V / 12 V, 300 lumens, luminous colour 3,000 K, illuminance (1 m) with lens 850 lux / without lens 470 lux | 20 watt Halogen wide | approx. 3 m H05RN-F 2x1.0 | 36° | 25° | | Protect. cl. II TÜV/GS tested |
| ML1250DUO | 4003644016082 | 250 V / 12 V, 780 lumens, luminous colour 3,000 K, illuminance (1 m) with lens 1,950 lux / without lens 2,700 lux | 50 watt Halogen wide | approx. 3 m H05RN-F 2x1.0 | 36° | 25° | | Protect. cl. II |



Made in Germany




Depending on the version, the ON/OFF switch is integrated in the lamp head or in the base. 1 retaining magnet, 1 table clip and the illuminant are included in the scope of delivery.



HEDI machine lamps

Spot or wide beam versions

| Art. no. | EAN | Output | Illuminant | Connecting cable | Beam angle | | Remark |
|-----------|---------------|--|-------------------------|------------------------------|------------|--|-----------------|
| ML1220B | 4003644016037 | 250 V / 12 V, 300 lumens, luminous colour 3,000 K, Illuminance 670 lux (1 metre) | 20 watt Halogen wide | approx. 3 m H05RN-F 2x1.0 | 36° | | Protect. cl. II |
| ML1220P | 4003644016044 | 250 V / 12 V, 150 lumens, luminous colour 2,800 K, Illuminance 3,800 lux (1 metre) | 20 watt Halogen spot | approx. 3 m H05RN-F 2x1.0 | 8° | | Protect. cl. II |
| ML1250B | 4003644016068 | 250 V / 12 V, 780 lumens, luminous colour 3,000 K, Illuminance 2,700 lux (1 metre) | 50 watt Halogen wide | approx. 3 m H05RN-F 2x1.0 | 36° | | Protect. cl. II |
| ML1203LED | 4003644014590 | 250 V / 12 V, 300 lumens, luminous colour 6,400 K, illuminance 600 lux (1 metre) | 3 LEDs, each 1 watt | approx. 3 m H05RN-F 2x1.0 | 54° | | Protect. cl. II |
| ML1206LED | 4003644000128 | 250 V / 12 V, 450 lumens, luminous colour 6,500 K, Illuminance 210 lux (1 metre) | 6 watts LED wide | approx. 3 m H05RN-F 2x1.0 | 50° | | Protect. cl. II |



Made
in
Germany

For use in industry and workshop:

Machine and workbench lamps.



ML2311F

TL2311

HEDI workbench lamps

Versions with fluorescent tube

| Art. no. | EAN | Output | Illumi- nant | Connecting cable | | Remark |
|----------|---------------|--|------------------|---------------------------------------|--|--|
| TL2311 | 4003644016013 | 250 V, luminous colour 6,400 K, illuminance 200 lux (1 metre) | 11 watts Tube | approx. 1.5 m H03VV-F 2x0.75 | | Protect. cl. II Beam angle 120°, without table magnet and clip |
| ML2311F | 4003644016020 | 250 V, luminous colour 6,400 K, illuminance 200 lux (1 metre) | 11 watts Tube | approx. 3 m H05RN-F 3G0.75 | | Protect. cl. I Beam angle 120°, length gooseneck 600 mm |



Made in
Germany

The HEDI machine lamps and table lamps with fluorescent tube are mainly used to illuminate well a larger surface of a workplace.



The strong permanent magnet with 80 mm diameter can be screwed into the lamp base. It holds extremely securely in each magnetic connection.



The massive table clip with stargrip screw and a span between 10 and 100 mm fits virtually on any workplace in industry and trade. The table clip connects with the lamp via the magnet in the lamp base.

Spare parts and illuminants

for HEDI machine lamps

| Art. no. | EAN | Description | Version / output | |
|-----------|---------------|---|---|--|
| ML80M6X12 | 4003644002276 | Spare retaining magnet 80 mm with screw | — | |
| 9082 | 4003644002283 | Spare table clip | — | |
| 9044 | 4003644015382 | Illuminants for TL2311 and ML2311F | Tube, 230 V / 11 W Luminous colour 6,400 K energy efficiency class A | |
| 9046 | 4003644015405 | Illuminant for ML1203LED | LED spot, 12 V / 3 x 1 W Luminous colour 6,400 K Energy efficiency class A | |
| 9064 | 4003644019304 | Illuminants for ML1220B, ML1220DUO | Halogen, 12 V / 20 W wide Luminous colour 3,000 K energy efficiency class B | |
| 9065 | 4003644019311 | Illuminants for ML1250B, ML1250DUO | Halogen, 12 V / 50 W wide Luminous colour 3,000 K energy efficiency class B | |
| 9069 | 4003644019335 | Illuminant for ML1220P | Halogen, 12 V / 20 W spot Luminous colour 2,800 K Energy efficiency class C | |
| 9084 | 4003644008445 | Illuminants for ML1206LED, ML1206DUO | LED spot, 12 V / 6 watts Luminous colour 6,500 K Energy efficiency class A | |



The full program of the genuine parts:

HEDI accessories

The excellent HEDI production program is completed by a comprehensive accessories program. Consistently, all accessories present themselves in proven quality and with elaborated details that make your work easier and promise a long service life.

We offer everything, from plugs, couplings and adapters, up to spare parts for our cable reels. Spare illuminants can be found in the "Lamps" section.

Excellent qualities:

- High quality
- Immediately available ex warehouse
- Easy handling
- Certified safety

The range includes:

| | |
|--|---------|
| ■ CableFix | Page |
| ■ Plugs, couplings and adapter cables | 128 |
| ■ Wall-mounted and flush-mounted sockets | 130-132 |
| ■ Spare parts for cable reels | 133 |
| | 134 |

Made 
in 
Germany 





The HEDI CableFix is the clever solution to tie up, suspend or carry cables, wires or hoses, for example.

The clever accessories:

HEDI CableFix.




The HEDI CableFix

| Art. no. | EAN | Locating band length | Loadability | Packing Unit (PU) | |
|----------|---------------|----------------------|--------------|-------------------|--|
| 9071S | 4003644013050 | 10 cm | up to 20 kg | 10 | |
| 9071L | 4003644013043 | 21 cm | up to 50 kg | 10 | |
| 9071XL | 4003644002856 | 30 cm | up to 100 kg | 10 | |

- Extremely rugged plastic hook
- Flexible rubber band with a loadability of up to 100 kg (depending on version)



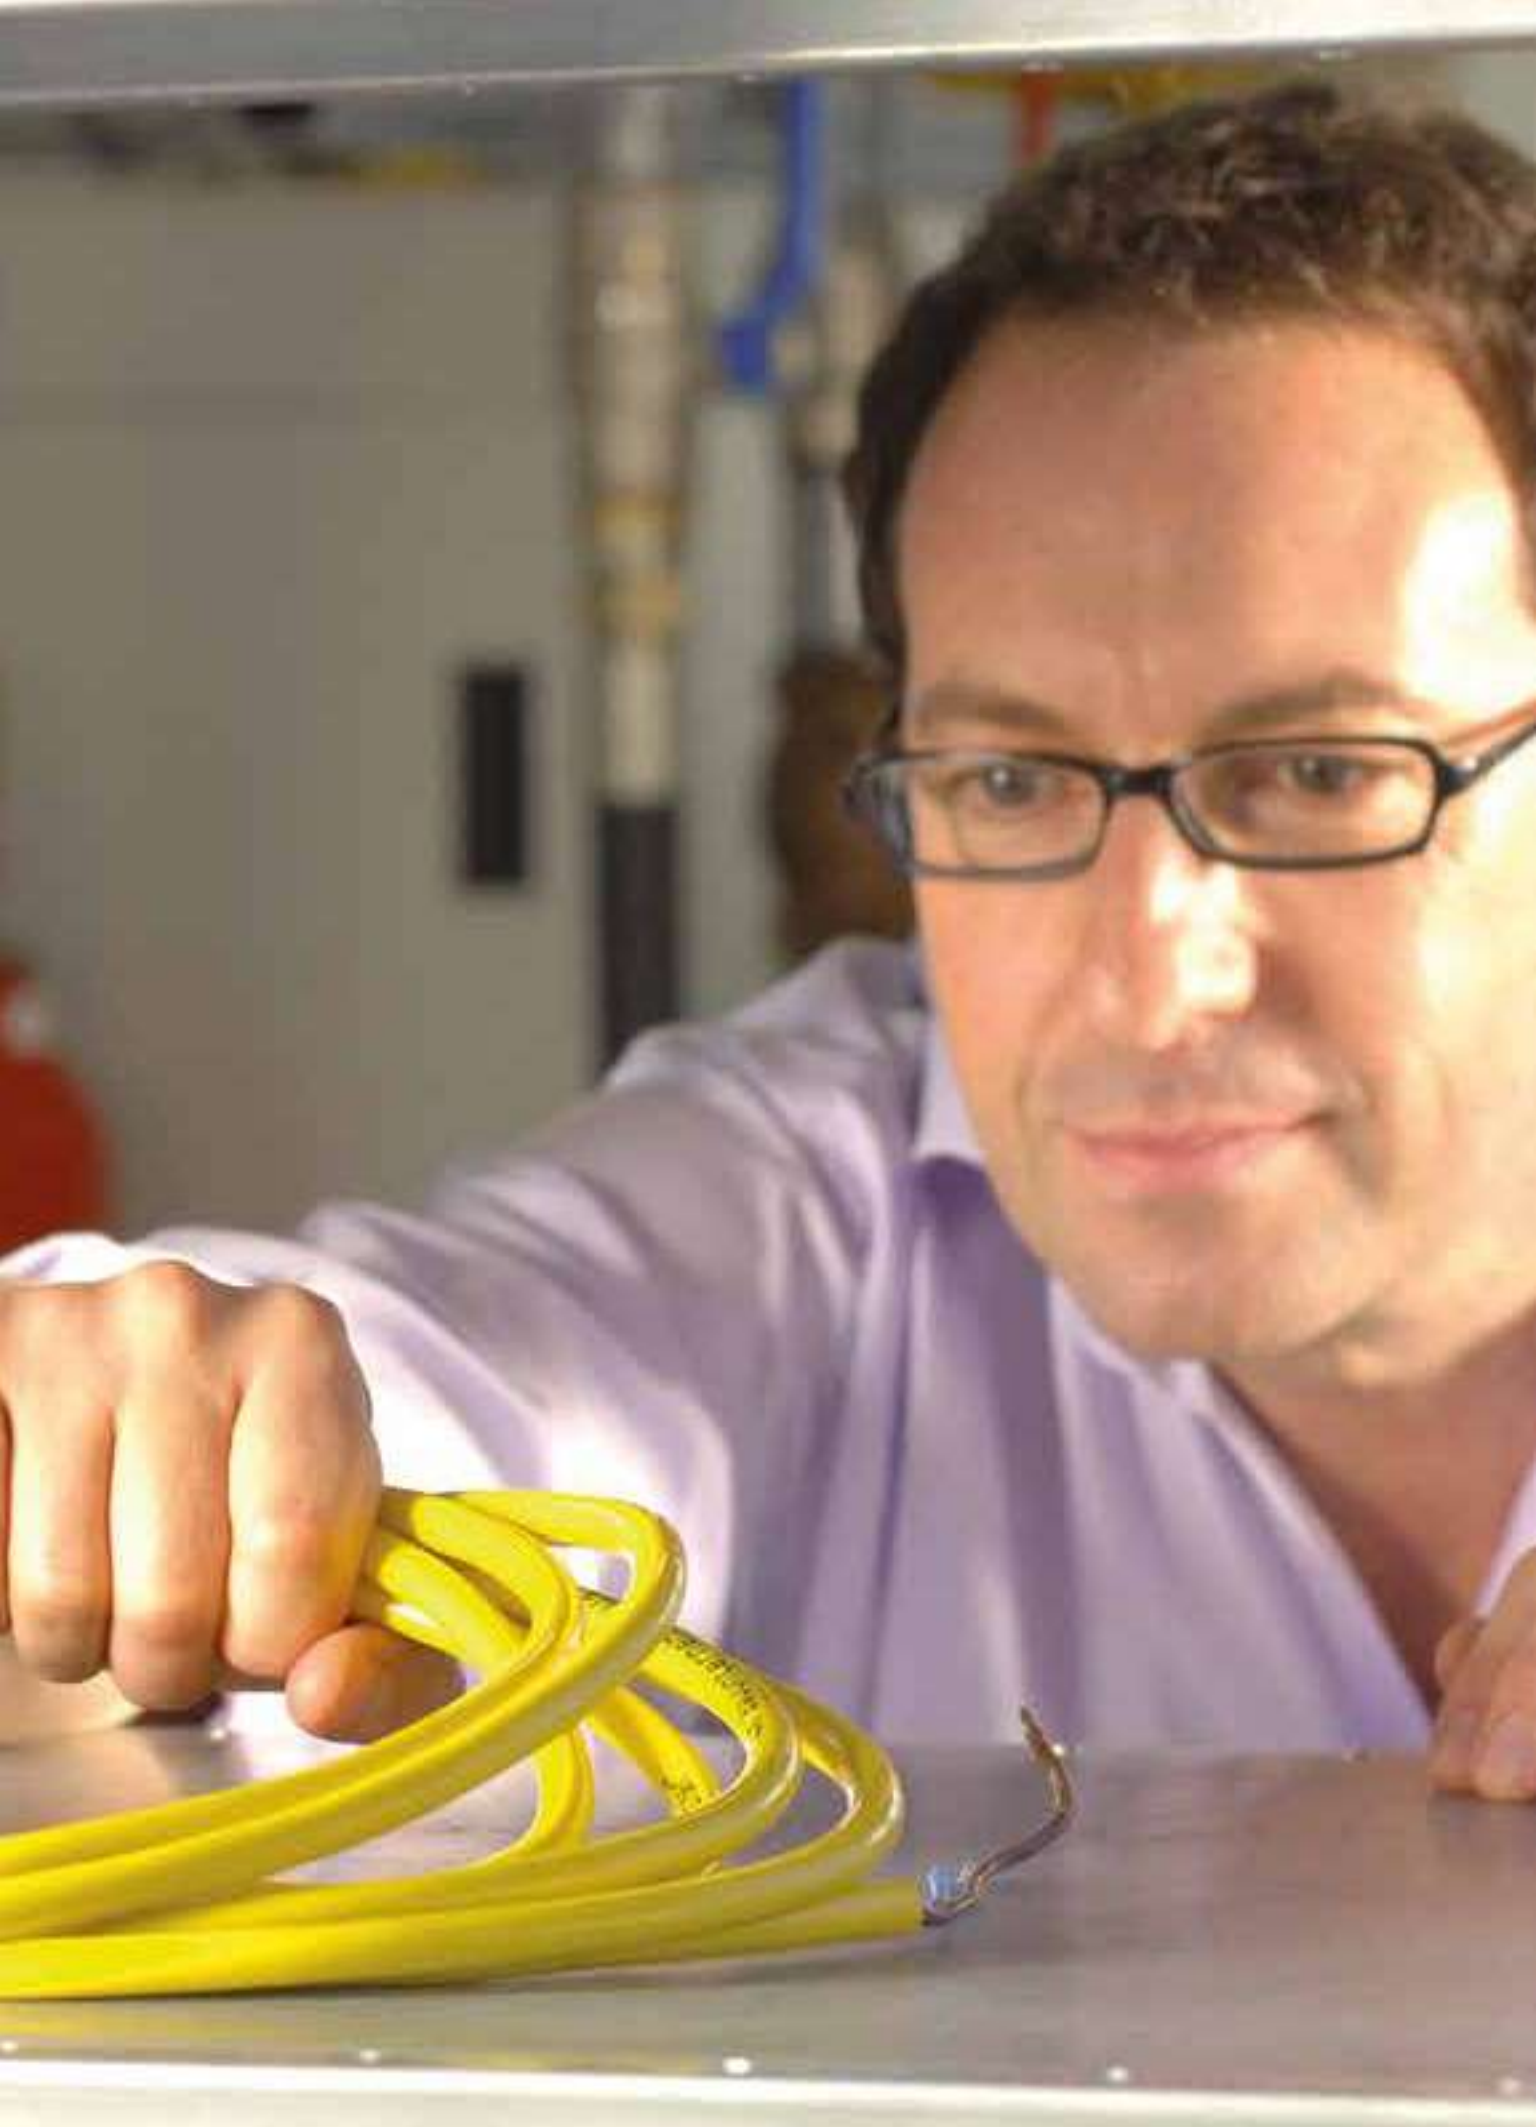



Always the proper accessories:


Plugs, couplings and adapter cables, 250 V.



Schuko plug and socket

Rugged rubber version, black, for use at construction sites and in industry

| Art. no. | EAN | Description | Version | |
|----------|---------------|---------------------------------|--|--|
| 9003 | 4003644008513 | Schuko coupling with lid, black | 250 V / 16 A, for cross-sections up to 3x2.5 mm ² | |
| 9004 | 4003644008506 | Schuko plug black | 250 V / 16 A, for cross-sections up to 3x2.5 mm ² | |



3-fold pendant coupling

Rugged rubber version, blue / black, for use at construction sites and in industry

| Art. no. | EAN | Description | Version | |
|----------|---------------|--|--|--|
| 9061 | 4003644015689 | Schuko coupling, 3-fold with lids, black | 16 A / 250 V, for cross-sections up to 3x2.5 mm ² | |



4-fold pendant coupling

Rugged plastic version, black, for use at construction sites and in industry

| Art. no. | EAN | Description | Version | |
|----------|---------------|---|--|--|
| 9043 | 4003644015085 | Schuko coupling, 4-fold with hinged lids, black | 16 A / 250 V Cross-section max. 3 x 1.5 mm ² | |






CEE plug and coupling

3x16 A / 250 V, rugged version for use at construction sites and in industry


| Art. no. | EAN | Description | Version | |
|----------|---------------|--|--|--|
| 9005 | 4003644008520 | CEE connector 3x16 A With twist quick-release fastener | 250 V / 16 A, for cross-sections up to 3x2.5 mm ² | |
| 9007 | 4003644008537 | CEE coupling 3x16 A with hinged lid and twist quick-release fastener | 250 V / 16 A, for cross-sections up to 3x2.5 mm ² | |



CEE adapter cable

3x16 A / 250 V, rugged version for use at construction sites and in industry

| Art. no. | EAN | Description | Version | |
|-----------|---------------|--|--------------------------------|--|
| AK-SS-CK | 4003644004546 | Input: Schuko Output: CEE 3x16 A | Length: 1.5 m H07RN-F 3G1.5 | |
| AK-SS-CK2 | 4003644002603 | Input: Schuko Output: CEE 3x16 A | Length: 1.5 m H07RN-F 3G2.5 | |
| AK-CS-SK | 4003644004515 | Input: CEE 3x16 A Output: Schuko | Length: 1.5 m H07RN-F 3G1.5 | |
| AK-CS-SK2 | 4003644002597 | Input: CEE 3x16 A Output: Earthing pin system | Length: 1.5 m H07RN-F 3G2.5 | |





Always the proper accessories:


Plugs, couplings and adapter plugs, 400 V.

CEE plug and coupling

5x16 A, 400 V, rugged version for use at construction sites and in industry, for cross-sections up to 5x4.0 mm²



| Art. no. | EAN | Description | Version | |
|----------|---------------|---|---|--|
| 9006 | 4003644008544 | CEE connector 5x16 A With twist quick-release fastener | 16 A / 400 V, for cross-sections up to 5x4.0 mm ² | |
| 9009 | 4003644019342 | Phase reversal plug CEE 5x16 A | 16 A / 400 V, for cross-sections up to 5x4.0 mm ² | |
| 9008 | 4003644008551 | CEE coupling 5x16 A With twist quick-release fastener | 16 A / 400 V, for cross-sections up to 5x4.0 mm ² | |



CEE plug and coupling

5x32 A, 400 V, rugged version for use at construction sites and in industry, for cross-sections up to 5x6.0 mm²



| Art. no. | EAN | Description | Version | |
|----------|---------------|---|---|--|
| 9052 | 4003644008568 | CEE connector 5x32 A With twist quick-release fastener | 32 A / 400 V, for cross-sections up to 5x6.0 mm ² | |
| 9010 | 4003644019359 | Phase reversal plug CEE 5x32 A | 32 A / 400 V, for cross-sections up to 5x6.0 mm ² | |
| 9053 | 4003644008575 | CEE coupling 5x32 A With twist quick-release fastener | 32 A / 400 V, for cross-sections up to 5x6.0 mm ² | |




CEE adapter plug

5x16 A / 5x32 A or 5x32 A / 5x16 A, rugged version for use at construction sites or in industry



| Art. no. | EAN | Description | Installed fuses | |
|----------|---------------|---|-----------------|--|
| AK1632F | 4003644002122 | Input: CEE 5x16 A, 400 V, phase reverser Output: CEE 5x32 A, 400 V | — | |
| AK3216F | 4003644002153 | Input: CEE 5x32 A, 400 V, phase reverser Output: CEE 5x16 A, 400 V | 3x C 16 A | |



Reliable and safe:

Wall-mounted and flush-mounted sockets.



Wall-mounted sockets CEE with hinged lid

| Art. no. | EAN | Version | |
|----------|---------------|-------------------------|--|
| 9057 | 4003644015740 | CEE 5x16 A, 400 V | |
| 9058 | 4003644015757 | CEE 5x32 A, 400 V | |
| 9059 | 4003644015764 | CEE 5x63 A, 400 V, IP67 | |



Wall-mounted combination socket CEE with hinged lid

| Art. no. | EAN | Outputs | |
|----------|---------------|--|--|
| 97001 | 4003644019366 | 1 x CEE 5x16 A, 400 V 1 x Schuko, 250 V | |



Flush-mounted Schuko socket with hinged lid, blue

| Art. no. | EAN | Outputs | |
|----------|---------------|--------------|--|
| 9060 | 4003644015696 | 16 A / 250 V | |



Flush-mounted CEE socket 250 V with hinged lid, blue

| Art. no. | EAN | Version | |
|----------|---------------|----------------|--|
| 9054 | 4003644015702 | 3x16 A / 250 V | |



Flush-mounted CEE sockets 400 V with hinged lid, red

| Art. no. | EAN | Version | |
|----------|---------------|----------------|--|
| 9055 | 4003644015719 | 5x16 A / 400 V | |
| 9056 | 4003644015726 | 5x32 A / 400 V | |





Genuine HEDI:

Spare parts for cable reels.

Socket inserts



| Art. no. | EAN | Description | |
|----------|-----|--|--|
| SD4T | — | 4-fold, Schuko with thermostatic circuit-breaker, for plastic reel protection rating IP20 | |
| SDKS4T | — | 4-fold, Schuko with thermostatic circuit-breaker, for steel-sheet cable reel, protection rating IP20 | |
| SD3TF | — | 3-fold, Schuko with thermostatic circuit-breaker and DiagS Protection rating IP44 | |
| K12D210T | — | 2 x Schuko 1 x CEE 5x16 A with thermostatic circuit-breaker Protection rating IP44 | |

These versions are designed for the cable reel series StarLite, Primus and Professional, year of manufacture 2010 and later. Please inquire for other and older versions.

Thermostatic circuit-breaker



| Art. no. | EAN | Description | |
|----------|-----|-------------|--|
| 40643 | — | 1-pole | |
| 40858 | — | 3-pole | |

These versions are designed for the cable reel series StarLite, Primus and Professional, year of manufacture 2010 and later. Further versions on request.

Explanation of pictograms and mnemonics:

Technical detail.

Explanation of symbols

According to BGI 600 / BGI 608 (only valid in Germany):



Splash-water protected



Presswater-proof



Residual current operated circuit breaker (RCCB)



Indoor use



Outdoor use



Outdoor use / dust- and splash-proof



Outdoor use / protected against water jets



Use for difficult conditions



Workshop, storage and production areas without high mechanical, physical or chemical impact on the electrical equipment



Workshop, storage and production areas with high mechanical as well as thermal and mechanical impact on the electrical equipment used



Corresponds to the current BGI 608/ DGVV Information 203-006 (only valid in Germany)



Tested safety



With cable printing armoured cable



With cable printing armoured cable Plus



Protective circuit-breaker



Tested by KEMA Quality B.V.



Schuko socket 16 A



CEE socket 3x16 A



CEE socket 5x16 A



CEE socket 5x32 A



Compressed-air connection

Cable types and application areas

H05VV-F: PVC cables, approved only in dry rooms.

H05RR-F: Rubber cable; natural rubber insulation, approved in dry rooms and for short-term outdoor use.

H07RN-F: Neoprene rubber cable, oil and UV-resistant, approved outdoors and on building sites.

AT-N07V3V3-F: HEDI armoured cable (K35) for particularly harsh operation. It is completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement. Robust against abrasion and bruising. Admissible temperature range -35 °C to +80 °C. Approved for permanent outdoor use.

H07BQ-F: HEDI armoured cable PLUS. Polyurethane cable, for highest demands. It is completely weatherproof, oil- and acid-resistant, microbe-proof and resistant to embrittlement. High mechanical strength. Admissible temperature range -40 °C to +90 °C. Approved outdoors and on building sites.



Performance data - cable reel


| | AC | three-phase AC, 16 A | three-phase AC, 32 A |
|----------------|---------|----------------------|----------------------|
| Cable wound up | 1,100 W | 3,000 W | 6,100 W |
| Cable unwound | 3,500 W | 9,500 W | 19,500 W |

All technical data and prices without obligation. Sold exclusively through the trade. All prices plus statutory VAT.

Foreign plug systems


The early European orientation of the HEDI brand is also reflected in the consistent product policy, which includes all common foreign plug systems. All foreign plug systems are supplied with thermal protection.

British plug-in system

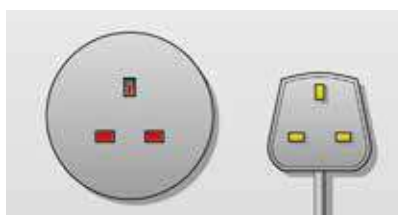


- 3-way socket layout

French and Belgian plug-in system

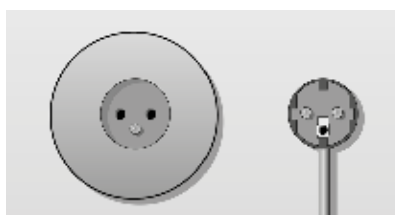

- 4-way socket layout, IP20 protection rating
- 3-way socket layout, IP44 protection rating
- With integrated child protection

Swiss plug-in system

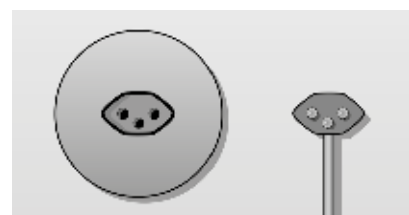

- 4-way socket layout, IP20 protection rating
- 3-way socket layout, IP44 protection rating



Made in Germany



In this catalogue, all important characteristic details are additionally marked with pictograms. These pictograms and other characters are described in detail on the inner page.

Fold out page 135 and you have an overview of the explanations at all times when you browse through the catalogue.



Part no. 8016 / 02.2018 / 1st edition | Subject to technical changes and errors.
All prices are valid until revoked. All content, pictures and graphics are protected by copyright.
Any duplication or reproduction of individual contents is prohibited without the consent of the copyright holder HEDI.

HEDI GmbH | Elektro- und Gerätebau
Schöneggweg 17 | D-87727 Babenhausen
Phone: +49 (0) 8333/9211-0 | Fax: +49 (0) 8333/9211-75
e-mail: vertrieb@hedi.de | www.hedi.de